

MANULIFT 6350

Wall-mounted manually height-adjustable worktop unit, cranked winding handle

Under the worktop, space is left for the knees and legs. Installations under the worktop, (brackets, water, sewers), can be concealed by telescopic cover panels which gives the kitchen a neat look.

30 cm stepless height adjustment by a cranked winding handle.
The lift is prepared in the factory to facilitate easy installation.





Functions and advantages

- Height adjustment by a cranked winding handle
- Height-adjustable 70-100 cm above the floor (excl. top board)
- The frame depth is adjustable 56-59 cm to fit adjoining cabinet
- The upper part of the lifting system is delivered ready-mounted. The sides are pre-assembled and adjustable sideways to suit the sink, hob and drawers
- The lifting system is adjustable at an angle to compensate for an inclined wall
- 10 cm free space under the wall brackets for electrical installations and piping

Standard equipment


- Factory-mounted aluminium system with movable and tiltable brackets
- Wall brackets and cranked winding handle

Recommended additional options

- | | |
|---------------------------|------------------|
| - Front | - Rear edge trim |
| - Hose cover/cover panels | - Top board |
| - Sink | - Hob |
| - Drawer | |

Useful information

- Fittings for top board and fronts enclosed
- *The top board's depth must be 15 mm shallower than adjoining top boards (to provide a gap for tiles and movement)*
- Width of the top board = width of the lift
- Sink bowls with a maximum height of 120 mm can be integrated
- Width of front = width of lift -4 mm
Height of front: 103 mm
Fittings enclosed
- Cover panels can hide installations under the worktop
2 pcs width = width of lift -10 mm, height 438 mm, thickness 12-20 mm

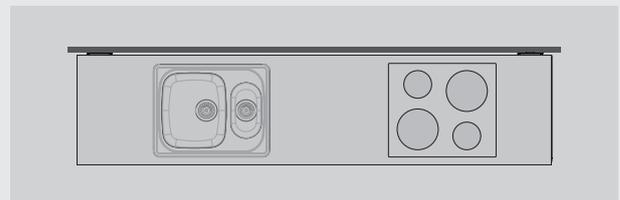

Specify the location of drawers, sink and hob

The worktop is prepared in the factory. Drawers are mounted and sides assembled to facilitate the final mounting on the spot.

6350H






Specifications

Mounting	Wall
Height adjustment	300 mm stepless height adjustment by a cranked winding handle
Number of turns / cm height adjustment	3,3
Plumbing connections	Connection is made with flexible hoses
Maximum load	100 kg
Frame depth	560-590 mm from wall
Front height	103 mm
Dimensions of cover panels	2 pcs, width = width of the lift -10 mm, height 438 mm, thickness 12-20 mm
Width of top board	Width = width of the lift
Depth of top board	565-630 mm (15 mm shallower than worktops on fixed cabinets)
Gap to the side to wall/adjoining cabinet	5 mm
Gap to wall (for tiling)	15 mm
Tiling	From 700 mm above the floor (alternatively all the way down to the floor)
Delivery modules	Ready-mounted worktop incl. wall-mounted brackets
Fittings enclosed	Brackets for fronts and top board
Material specifications	Aluminium frame
Guarantee	2 years
	CE

Measurement data

(mm)

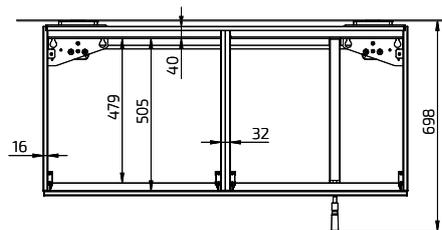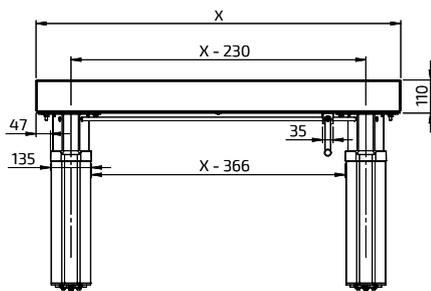

MANULIFT 6350HA

Wall-mounted worktop unit 59.0-100.0 cm width



Width (cm)	Art. no.
59.0	6350HA-059
60.0	6350HA-060
69.0	6350HA-069
70.0	6350HA-070
79.0	6350HA-079
80.0	6350HA-080
89.0	6350HA-089
90.0	6350HA-090
99.0	6350HA-099
100.0	6350HA-100

MANULIFT 6350HA

Wall-mounted worktop unit 109.0 - 180.0 cm width



109.0	6350HA-109
110.0	6350HA-110
119.0	6350HA-119
120.0	6350HA-120
129.0	6350HA-129
130.0	6350HA-130
139.0	6350HA-139
140.0	6350HA-140
149.0	6350HA-149
150.0	6350HA-150
159.0	6350HA-159
160.0	6350HA-160
169.0	6350HA-169
170.0	6350HA-170
179.0	6350HA-179
180.0	6350HA-180

MANULIFT 6350HA

Wall-mounted worktop unit 189.0 - 240.0 cm width



189.0	6350HA-189
190.0	6350HA-190
199.0	6350HA-199
200.0	6350HA-200
209.0	6350HA-209
210.0	6350HA-210
219.0	6350HA-219
220.0	6350HA-220
229.0	6350HA-229
230.0	6350HA-230
239.0	6350HA-239
240.0	6350HA-240

	Multi-compartment frame, ALU-design Collects power socket and power switch in a multi-compartment frame.	
	Two-compartment frame: 153 x 82 x 9 mm	61352
	Three-compartment frame: 225 x 82 x 9 mm	61353

	Socket, ALU-design Earthed socket 230 V with flap cover.	
	Dimensions: 82 x 82 x 17 mm Only Europe	61330

	Power switch, ALU-design For lighting, for example. The button has a sign for desired marking.	
	Dimensions: 82 x 82 x 17 mm	61331

	Front, white-lacquered aluminium Replace xxx with cm when ordering. Example, 385H-040-01 for 40.0 cm	
	Lacquered aluminium, white RAL 9003 Height: 103 mm Optional length, 20.0-340.0 cm	385H-xxx-01

	Front, anodised aluminium Replace xxx with cm when ordering. Example, 385H-040-06 for 40.0 cm	
	Anodised aluminium Height: 103 mm Optional length, 20.0-340.0 cm	385H-xxx-06


	Integrated drawer with full extension and soft-close or push-to-open function Depth: 470 mm, height: 85 mm Colour: Anthracite (RAL 9004)	
	30.0 cm	465H-030
	40.0 cm	465H-040
	50.0 cm	465H-050
	60.0 cm	465H-060
	80.0 cm	465H-080
	30.0 cm - Push-to-open function	466H-030
	40.0 cm - Push-to-open function	466H-040
	50.0 cm - Push-to-open function	466H-050
	60.0 cm - Push-to-open function	466H-060
80.0 cm - Push-to-open function	466H-080	

	Cutlery compartment	
	Fits 30.0 cm wide drawer	463-030
	Fits 40.0 cm wide drawer	463-040
	Fits 50.0 cm wide drawer	463-050
	Fits 60.0 cm wide drawer	463-060
	Fits 80.0 cm wide drawer	463-080

	Hob cover under worktop lift Provides a smooth underside. Used under the hob.	
	White-lacquered metal RAL 9003	
	60.0 cm	6266-060
	70.0 cm	6266-070
	80.0 cm	6266-080
	90.0 cm	6266-090
100.0 cm	6266-100	

	Cover panels Used to cover installations under the worktop.	
	12 mm white melamine, 2 pcs height 438 mm	6260-240

	Fittings set for cover panels Used to mount cover panels that conceal installations under the worktop.	
	Colour: Alu-grey RAL 9006	6260-005

	Hose cover The hose cover is mounted anywhere under the worktop, (next to motors, if applicable) to provide a neat coverage of hoses when the cover panels are not in use. Fittings are included.	
	Width: 410 mm, Depth: 200 mm White plastic Grey plastic	61504-01 61504-06

	Rear edge trim in aluminium for top board Mounted behind the top board. Brushed aluminium	
	Height above top board: 20 mm Thickness behind top board: 3 mm (per metre)	6943-06

With our new concept, we are introducing a whole new generation of flexible height adjustable modular worktops. The complete kitchen worktops simplify planning interior designs for public spaces such as retirement homes, schools, preschools and hospitals.

6350-ES11



- Sink module with under-glued inset sink ES11
- Module width 79-159 cm
- Left, centre, or right version



6350-ES20



- Sink module with under-glued inset sink ES20
- Module width 79-159 cm
- Left, centre, or right version



6350-ES30



- Sink module with under-glued inset sink ES30
- Module width 79-159 cm
- Left, centre, or right version



6350-ESG



- Sink module with stainless steel sink with two shallow sink bowls, ESG
- Module width 119 / 139 / 159 cm
- Left or right version



6350-ESH



- Sink module with stainless steel sink with two shallow sink bowls, ESH
- Module width 119 / 139 / 159 cm
- Left or right version



6350-ESF



- Sink module with stainless steel sink with one shallow sink bowl, ESF
- Module width 99 / 119 cm
- Left or right version



6350-S4



- Hob module, glass ceramic hob, four cooking zones
- Module width 79-159 cm
- Left, centre, or right version



The modular worktops come complete with front rims, worktops, sinks and hobs. Bim-models can be downloaded from our website.

6350-ESFS



- Mini kitchen module with stainless steel sink with one shallow sink bowl and glass ceramic hob with two cooking zones
- Module width 99 / 119 cm
- Left or right version



6350-ES112



- Mini kitchen module with under-glued inset sink ES11 and glass ceramic hob with two cooking zones
- Module width 119 / 139 / 159 / 179 cm
- Left or right version



6350-ES114



- Combi module with under-glued inset sink ES11 and glass ceramic hob with four cooking zones
- Module width 219 / 239 / 259 / 279 / 299 cm
- Left or right version



6350-ES20S4



- Combi module with under-glued inset sink ES20 and glass ceramic hob with four cooking zones
- Module width 219 / 239 / 259 / 279 / 299 cm
- Left or right version



6350-ES30S4



- Combi module with under-glued inset sink ES30 and glass ceramic hob with four cooking zones
- Module width 219 / 239 / 259 / 279 / 299 cm
- Left or right version



6350-ESHS4



- Combi module with stainless steel sink with two shallow sink bowls and glass ceramic hob with four cooking zones
- Module width 219 / 239 / 259 / 279 / 289 cm
- Left or right version



6350-CT



- Module with worktop
- Module width 79-159 cm

