

# Height Adjustable Washbasins

- Ergonomic washbasins with adjustable height



## ABOUT US

GRANBERG



Six decades have passed since the Granberg brothers' joinery workshop built the first specially designed kitchen for the disabled. We now view our task in a broader perspective. It involves making day-to-day duties simpler and more convenient for everyone. By developing, manufacturing and supplying innovative comfort features for kitchens and bathrooms, we have achieved world leadership - but still with our feet firmly on the ground, and with the determination to become involved in your particular needs and requirements.

# CONTENT

---

ABOUT GRANBERG	4
GRANBERG HEIGHT-ADJUSTABLE WASHBASINS	7
ELECTRICALLY HEIGHT-ADJUSTABLE WASHBASINS	8
Designline 417	10
Basicline 433	18
Basicline 415	26
MANUALLY HEIGHT-ADJUSTABLE WASHBASINS	34
Basicline 401	36
Basicline 403	44
Basicline 406	52
WASHBASIN, MIXER AND ACCESSORIES	60
INSTALLATIONS	70



**The story began as early as 1870** in Ringarum, Sweden, when Otto Granberg built his first chairs. He sold these chairs at the local market. Business went well and Otto's joinery began mass-producing furniture. The factory soon relocated to Norrköping and expanded their range with windows, doors and staircases. After almost 30 years, Otto's son, Frans, took over the company. He followed in his father's footsteps, but also produced school furniture and interior joinery products. Just over thirty years later, Frans handed over the company to his sons, Nils, Bängt, Oscar and Erik. They continued to run the company the way their father and grandfather had.

Granberg quickly became known for the lifetime guarantee of its products. The quality was high and if anything were to break, the sons ensured it was repaired or replaced. A promise that still applies to this day. Personal service and reliable products. 90 years after Otto began making chairs, the company changed direction and Granberg's modern history began in 1960. The company started to develop products for the disabled and today is a world leader within this sector.



**Quality** has been an important part of our brand ever since Otto Granberg founded our company back in 1870. As a family business we are proud of the products we create. We therefore only supply quality products that we know well and with which we have been working for many years. We always provide a 2 year warranty for our products in order to make our customers feel even more secure.



**For your safety**, we work solely with CE marked lifting systems that have undergone risk analyses and tests. Our lifting systems are based on proven technology and have a built-in safety system that stops the moving parts if anything is in the way.






  
**SINCE 1870**  
GRANBERG

Granberg's height-adjustable washbasins for the handicapped and elderly make bathrooms function for all of us.

We all know how important a good start to the day can be. And as often as not, the day begins in the bathroom. With this in mind, we all understand why everything in the bathroom must work as conveniently as possible.

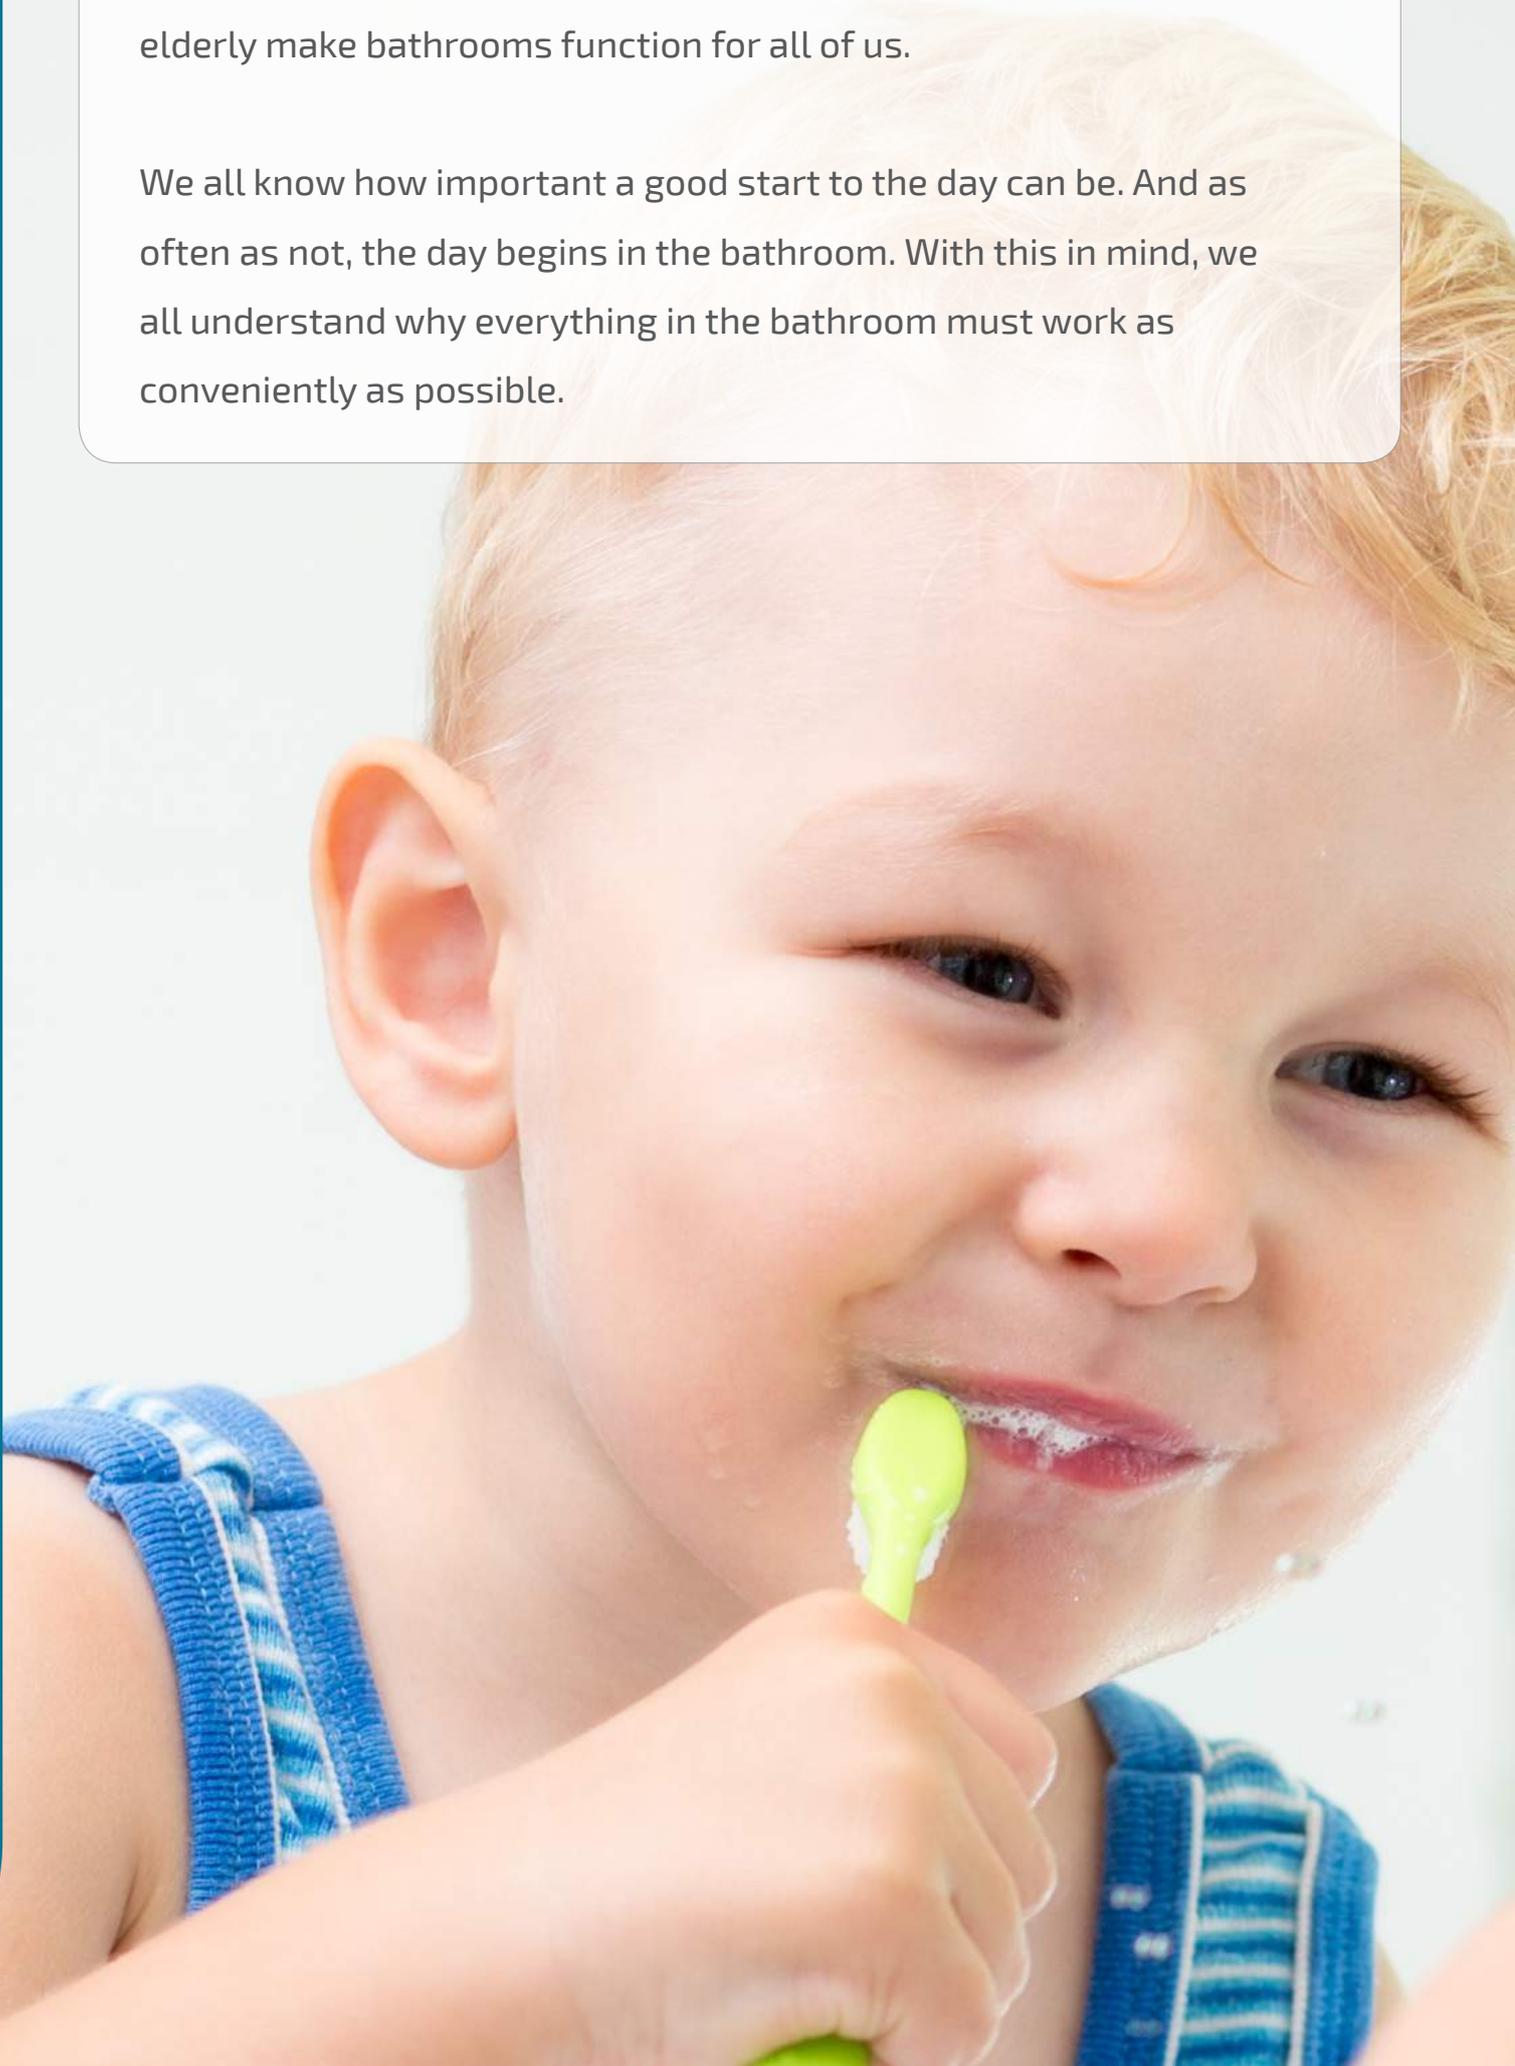

## Electric height-adjustable washbasins

Page 8



- Simple and convenient height adjustment
- The user is able to adjust the height
- Choose from several ergonomically designed washbasin models

## Manually height-adjustable washbasins

Page 34



- For public spaces or other places where height does not need adjusting on a daily basis
- Choose from several ergonomically designed washbasin models

## Washbasin, mixer and accessories

Page 60



- Functional washbasins with good ergonomics
- Mixer with extended lever
- Flexible hoses and safety system


# Product highlights

Electric height-adjustable washbasins

Designline 417

Page 10

- Width 71.5 cm
- Modern design with multiple colour choices
- Mirror and lighting move in tandem with basin
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller

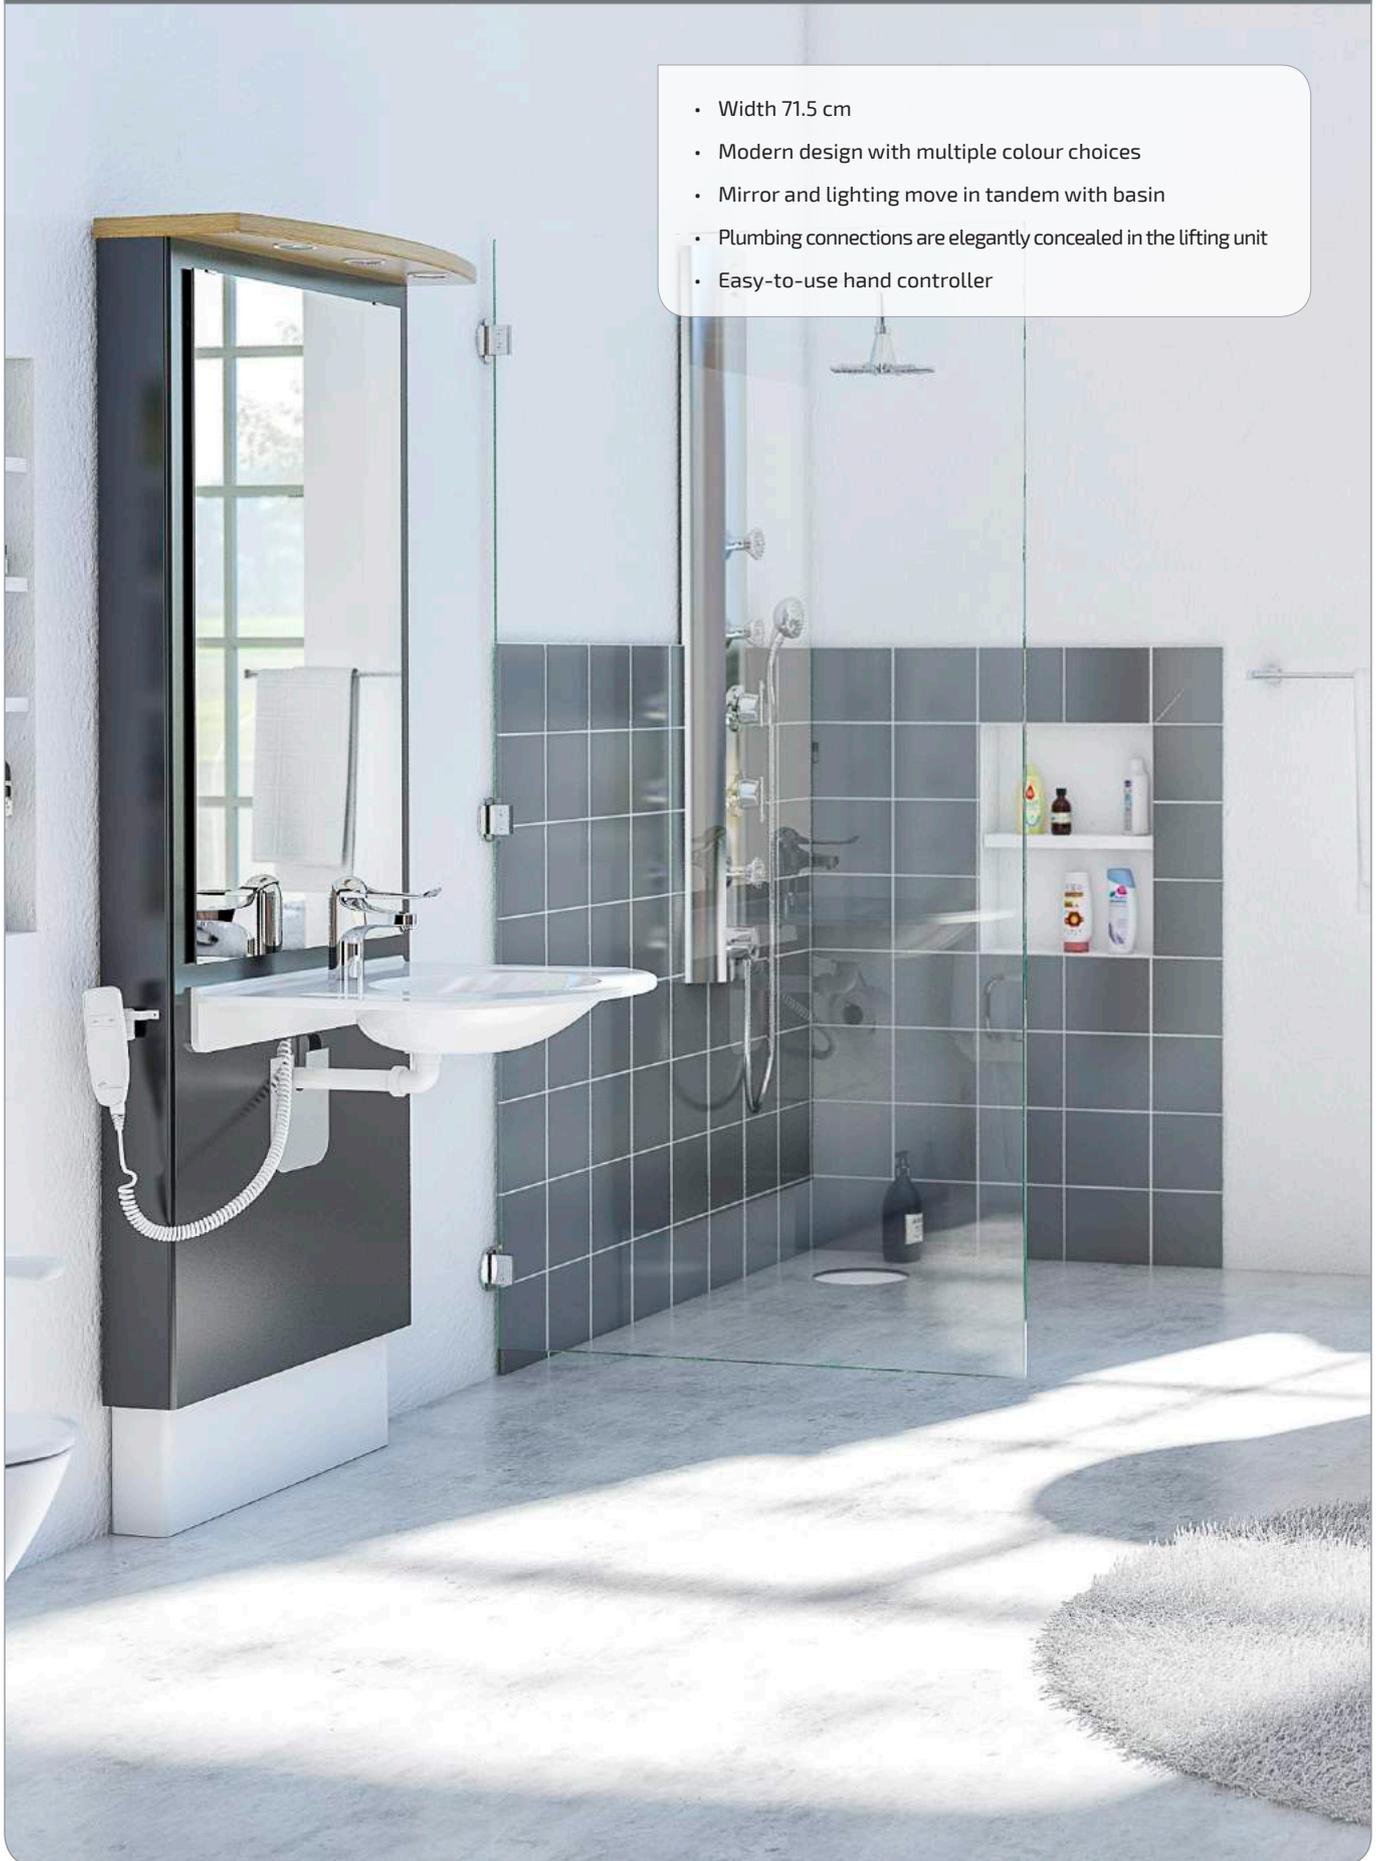



- Width 62 cm
- Integrated safety switch
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections
- Easy-to-use hand controller



- Width 65 cm
- Integrated safety switch
- Low unit (installs under wall-mounted mirror/cabinet)
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller

# Designline 417

Electric height-adjustable washbasin module with mirror and lighting

- Width 71.5 cm
- Modern design with multiple colour choices
- Mirror and lighting move in tandem with basin
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller





417-11-05

Page 12



- Overall depth 56.7 cm
- Compact washbasin for children or confined spaces

417-01-05

Page 13



- Overall depth 61.2 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

417-03-05

Page 14



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

417-10-05

Page 15



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

417-15-05

Page 16



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



**Functions and advantages**

- Legroom under the washbasin, 445 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**

- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

**Optional extras**


- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	445 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	567 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
 417-11-0501	DESIGNLINE 417-11-0501, White - incl. single lever mixer with 150 mm lever
 417-11-0505	DESIGNLINE 417-11-0505, Oak - incl. single lever mixer with 150 mm lever
 417-11-0510	DESIGNLINE 417-11-0510, Black - incl. single lever mixer with 150 mm lever

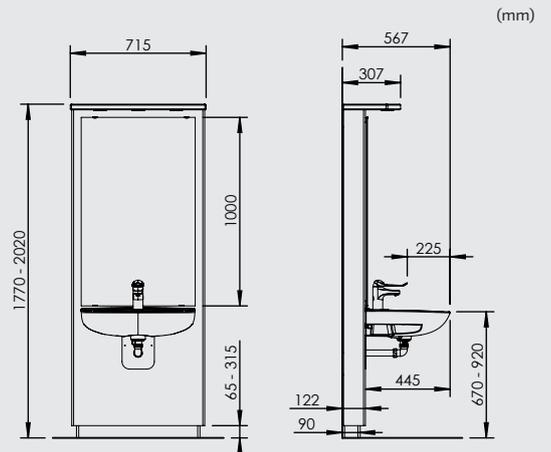

01 - White laminate (Formica F7949, white)  
05 - Oak laminate (Formica K6149, oak)  
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 59





**Functions and advantages**

- Legroom under the washbasin, 490 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**

- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

**Optional extras**

- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	490 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever 265 mm
<b>Overall depth from wall</b>	612 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap




Art. no.	Designation
 417-01-0501	DESIGNLINE 417-01-0501, White - incl. single lever mixer with 150 mm lever
 417-01-0505	DESIGNLINE 417-01-0505, Oak - incl. single lever mixer with 150 mm lever
 417-01-0510	DESIGNLINE 417-01-0510, Black - incl. single lever mixer with 150 mm lever

- 01 - White laminate (Formica F7949, white)
- 05 - Oak laminate (Formica K6149, oak).
- 10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 69

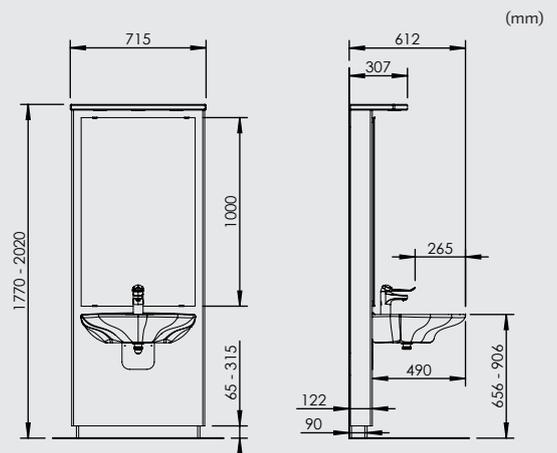



**Functions and advantages**

- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**

- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

**Optional extras**


- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	550 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	672 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
 417-03-0501	DESIGNLINE 417-03-0501, White - incl. single lever mixer with 150 mm lever
 417-03-0505	DESIGNLINE 417-03-0505, Oak - incl. single lever mixer with 150 mm lever
 417-03-0510	DESIGNLINE 417-03-0510, Black - incl. single lever mixer with 150 mm lever

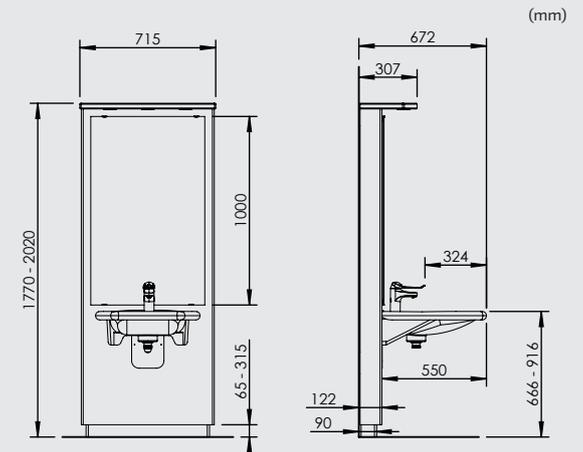

01 - White laminate (Formica F7949, white)  
05 - Oak laminate (Formica K6149, oak).  
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 69





**Functions and advantages**

- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

**Optional extras**

- Safety breaker



**Specifications**


<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	550 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	672 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 417-10-0501	DESIGNLINE 417-10-0501, White - incl. single lever mixer with 150 mm lever
 417-10-0505	DESIGNLINE 417-10-0505, Oak - incl. single lever mixer with 150 mm lever
 417-10-0510	DESIGNLINE 417-10-0510, Black - incl. single lever mixer with 150 mm lever

- 01 - White laminate (Formica F7949, white)
- 05 - Oak laminate (Formica K6149, oak).
- 10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 69

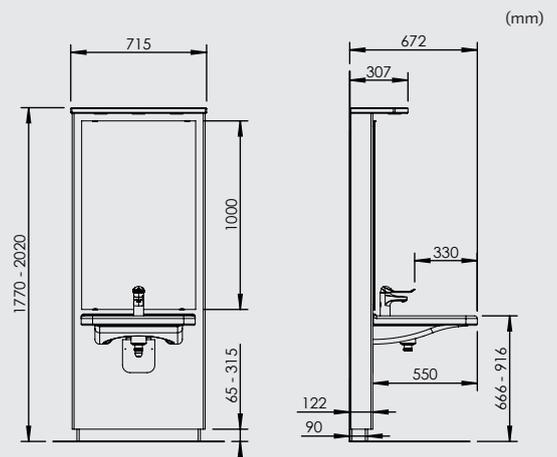



**Functions and advantages**


- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

**Optional extras**


- Safety breaker

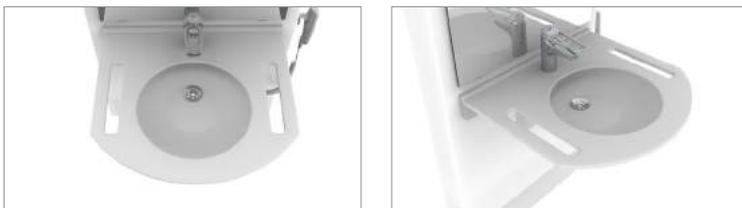

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	550 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	672 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 √ recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 417-15-0501	DESIGNLINE 417-15-0501, White - incl. single lever mixer with 150 mm lever
 417-15-0505	DESIGNLINE 417-15-0505, Oak - incl. single lever mixer with 150 mm lever
 417-15-0510	DESIGNLINE 417-15-0510, Black - incl. single lever mixer with 150 mm lever

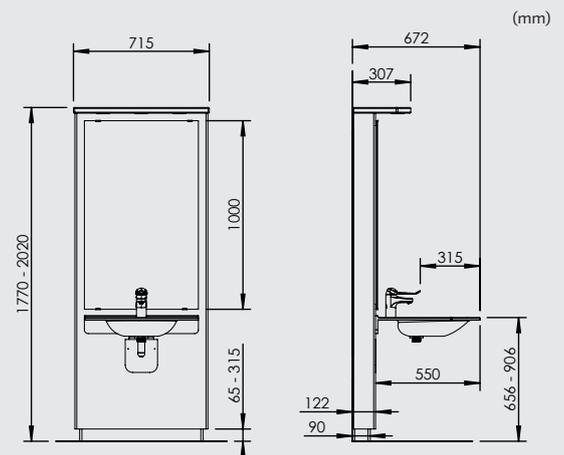

01 - White laminate (Formica F7949, white)  
 05 - Oak laminate (Formica K6149, oak).  
 10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 59





**Functions and advantages**

- Basin lifter for the optional washbasin

**Standard equipment**

- Mirror and lighting bar
- Hand controller with coiled cable

**Recommended options**

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	715 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	<b>Lighting ramp:</b> Solid oiled oak with 3 recessed spotlights (connected to external power switch) <b>Spotlights:</b> LED 3W, 3000K <b>Transformer:</b> 230V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Suitable basins</b>	Max. weight: 40 kg Max width 670 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Mounting cover:</b> White plastic
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 417-0-01	DESIGNLINE 417-0-01, White - Excl. water hoses and drain hose
 417-0-05	DESIGNLINE 417-0-05, Oak - Excl. water hoses and drain hose
 417-0-10	DESIGNLINE 417-0-10, Black - Excl. water hoses and drain hose

**Washbasin**



Page 62

**Mixer**



Page 65

**Hoses**



Page 68

**Safety system**




Page 69

**Control buttons**



Page 69

01 - White laminate (Formica F7949, white)  
05 - Oak laminate (Formica K6149, oak).  
10 - Black laminate (Formica 2253, black)  
Also available in a selection of Formica laminate.

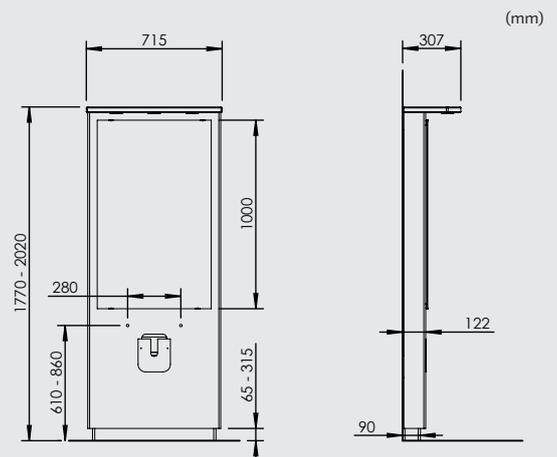

# Basicline 433

Electric height-adjustable washbasin module with mirror and lighting

- Width 62 cm
- Integrated safety switch
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections
- Easy-to-use hand controller





433-11-05

Page 20



- Overall depth 60.0 cm
- Compact washbasin for children or confined spaces

433-01-05

Page 21



- Overall depth 64.6 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

433-03-05

Page 22



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

433-10-05

Page 23



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

433-15-05

Page 24



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



**Functions and advantages**

- Legroom under the washbasin, 600 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**


- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	600 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	600 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Safety switch and other sheet metal parts:</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
433-11-05	BASICLINE 433-11-05 - incl. single lever mixer with 150 mm lever
	

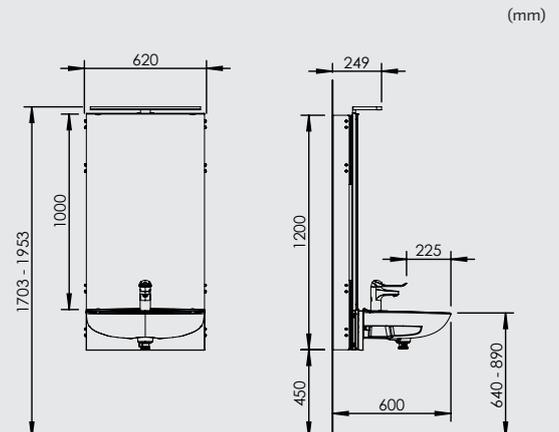



**Functions and advantages**

- Legroom under the washbasin, 646 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**


- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	646 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 265 mm
<b>Overall depth from wall</b>	646 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Safety switch and other sheet metal parts:</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap

CE

(mm)

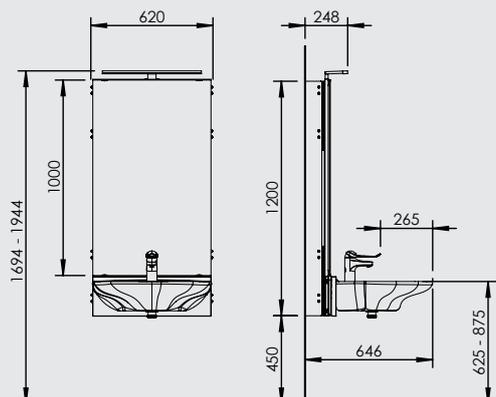

Art. no.	Designation
433-01-05	BASICLINE 433-01-05 - incl. single lever mixer with 150 mm lever





**Functions and advantages**

- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**


- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	706 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	706 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Safety switch and other sheet metal parts:</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
433-03-05	BASICLINE 433-03-05 - incl. single lever mixer with 150 mm lever
	

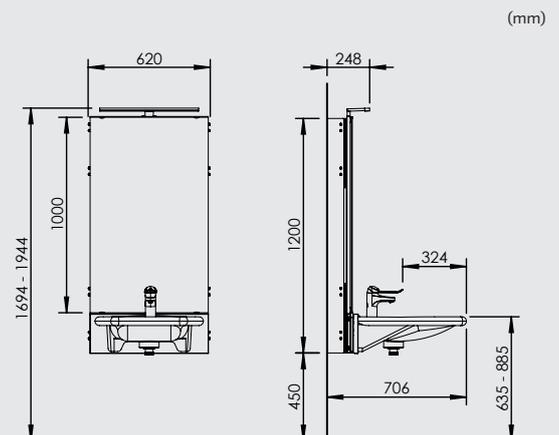



**Functions and advantages**

- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**


<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	706 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	706 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Safety switch and other sheet metal parts:</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap

CE

Art. no.	Designation
433-10-05	BASICLINE 433-10-05 - incl. single lever mixer with 150 mm lever



(mm)

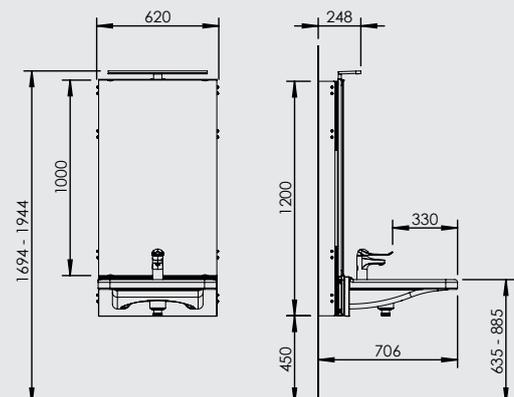



**Functions and advantages**

- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**


<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Legroom</b>	706 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	706 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Safety switch and other sheet metal parts:</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap



Art. no.	Designation
433-15-05	BASICLINE 433-15-05 - incl. single lever mixer with 150 mm lever



(mm)

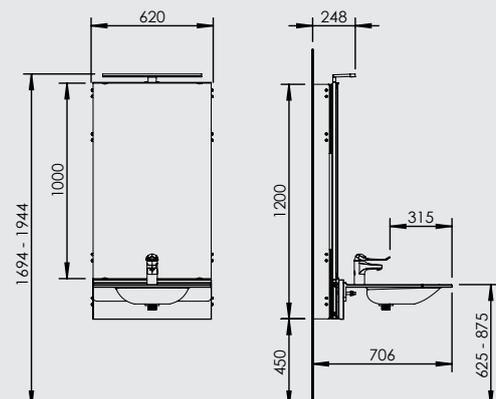



**Functions and advantages**

- Basin lifter for the optional washbasin

**Standard equipment**

- Mirror and lighting
- Hand controller with coiled cable

**Recommended options**

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker


**Specifications**

<b>Lift model</b>	Electric steplessly height-adjustable washbasin module with mirror and lighting
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	620 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Suitable basins</b>	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
<b>Material-specification</b>	<b>Back panel:</b> White melamine covered chipboard W899 with 2 mm ABS strip all round <b>Mounting plate, washbasin:</b> Powder coated aluzinc-coated sheet steel, white RAL 9010 <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Other sheet metal parts</b> Powder-coated sheet steel
<b>Plumbing connections</b>	Flexible drain hose with drainage trap
	CE

Art. no.	Designation
433-0.	BASICLINE 433-0 - Excl. safety switch , water hoses and drain hose



(mm)

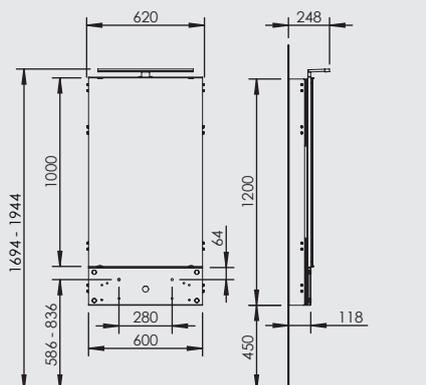

**Washbasin**

Page 62

**Mixer**

Page 65

**Hoses**

Page 68

**Safety system**

Page 69


**Control buttons**

Page 69

# Basicline 415

Electrically height-adjustable washbasin, low-profile

- Width 65 cm
- Integrated safety switch
- Low unit (installs under wall-mounted mirror/cabinet)
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller

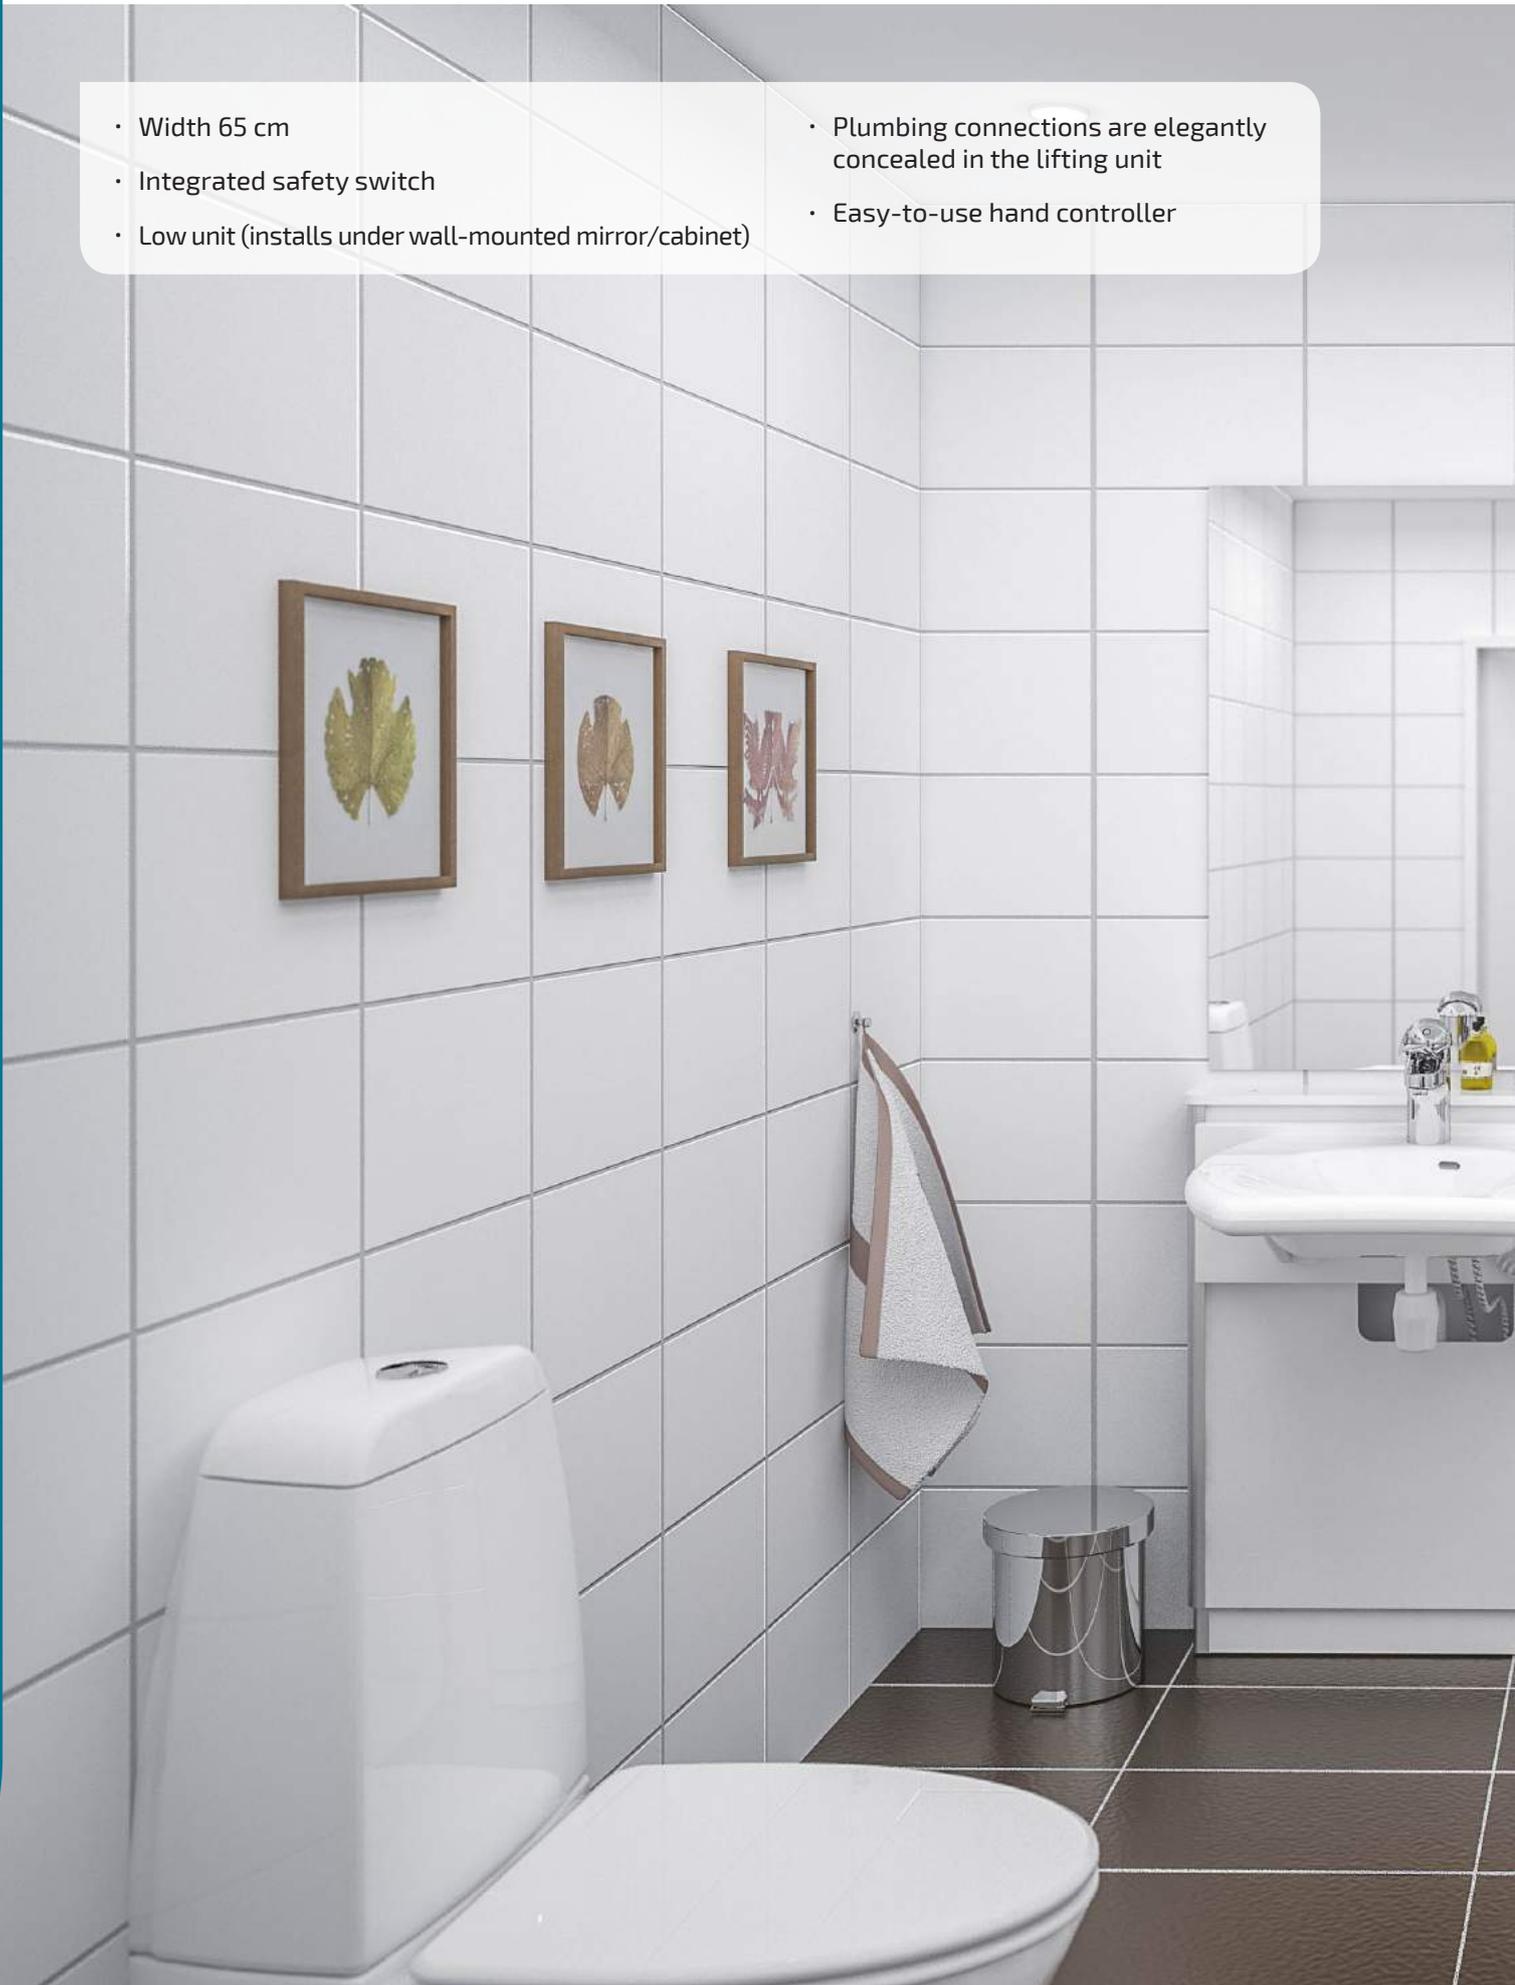



415-11-05

Page 28



- Overall depth 59.2 cm
- Compact washbasin for children or confined spaces

415-01-05

Page 29



- Overall depth 63.5 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

415-03-05

Page 30



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

415-10-05

Page 31



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

415-15-05

Page 32



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Functions and advantages**

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**

- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker


**Specifications**

<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Legroom</b>	482 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	592 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Safety switch:</b> Powder-coated sheet steel <b>Installation cover</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
415-11-05	BASICLINE 415-11-05 - incl. single lever mixer with 150 mm lever

(mm)

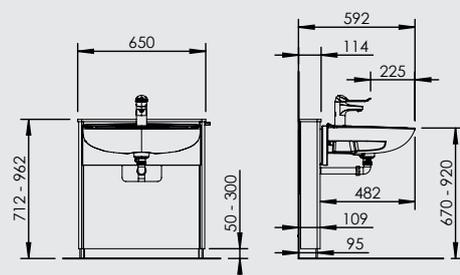

**Functions and advantages**

- Legroom under the washbasin, 526 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker


**Specifications**

<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Legroom</b>	526 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 265 mm
<b>Overall depth from wall</b>	635 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Safety switch:</b> Powder-coated sheet steel <b>Installation cover</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
415-01-05	BASICLINE 415-01-05 - incl. single lever mixer with 150 mm lever

(mm)

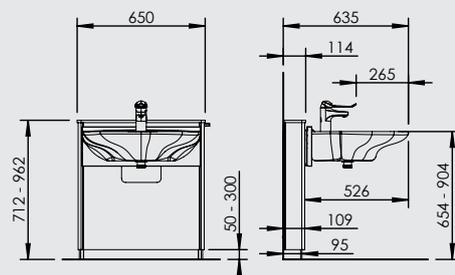

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker


**Specifications**

<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	695 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Safety switch:</b> Powder-coated sheet steel <b>Installation cover:</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
415-03-05	BASICLINE 415-03-05 - incl. single lever mixer with 150 mm lever

(mm)

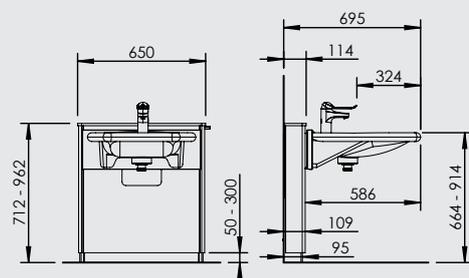

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**


<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	695 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Safety switch:</b> Powder-coated sheet steel <b>Installation cover:</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
415-10-05	BASICLINE 415-10-05 - incl. single lever mixer with 150 mm lever



(mm)

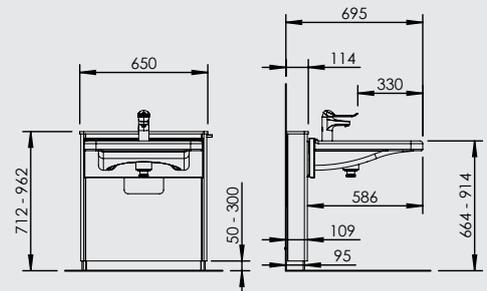

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

**Specifications**


<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	695 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	50 kg
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Safety switch:</b> Powder-coated sheet steel <b>Installation cover</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
415-15-05	BASICLINE 415-15-05 - incl. single lever mixer with 150 mm lever



(mm)

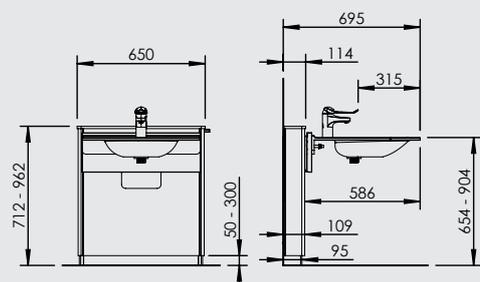

**Functions and advantages**

- Basin lifter for the optional washbasin

**Standard equipment**

- Hand controller with coiled cable

**Recommended options**

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker

**Specifications**

<b>Lift model</b>	Electric, steplessly adjustable washbasin unit, low-profile
<b>Operation</b>	Cable controller with hook, IP65
<b>Width</b>	650 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm
<b>Speed</b>	18 mm/sec.
<b>Lifting force</b>	100 kg
<b>Electrical connection</b>	Plug for 230 V, max 1.5A
<b>Enclosure class</b>	IPX4
<b>Safety</b>	Safety switch available as an option
<b>Suitable basins</b>	Max. weight: 40 kg Max width 590 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
<b>Material-specification</b>	<b>Back panel:</b> 4 mm compact laminate with sides of anodised aluminium <b>Top shelf:</b> 12 mm compact laminate <b>Installation cover</b> 4 mm compact laminate
<b>Plumbing connections</b>	Flexible drain hose with drainage trap
	CE




Art. no.	Designation
415-0.	BASICLINE 415-0 - Excl. safety switch , water hoses and drain hose



(mm)

<p><b>Washbasin</b></p> <p>Page 62</p>	<p><b>Mixer</b></p> <p>Page 65</p>	<p><b>Hoses</b></p> <p>Page 68</p>
<p><b>Safety system</b></p> <p>Page 69</p>	<p><b>Control buttons</b></p> <p>Page 69</p>	

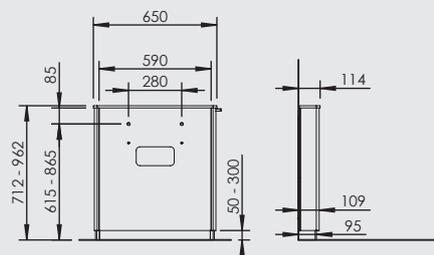

# Product highlights


Manually height-adjustable washbasins

Basicline 401

Page 36




- Width 60 cm
- Manual adjustment in intervals of 50 mm
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections

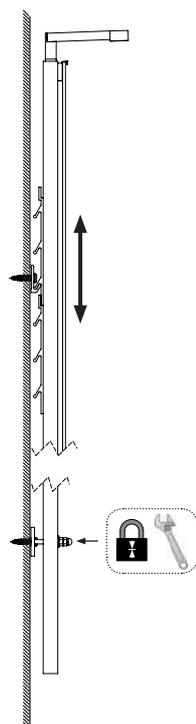




- Width 60 cm
- Manual, stepless adjustment with socket spanner
- Free space below the unit for plumbing connections




- Width 60 cm
- Manual adjustment with gas spring in intervals of 12 mm
- Practical countertop behind the washbasin
- Free space below the unit for plumbing connections



# Basicline 401

Manual height-adjustable washbasin module with mirror and lighting

- Width 60 cm
- Manual adjustment in intervals of 50 mm
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections

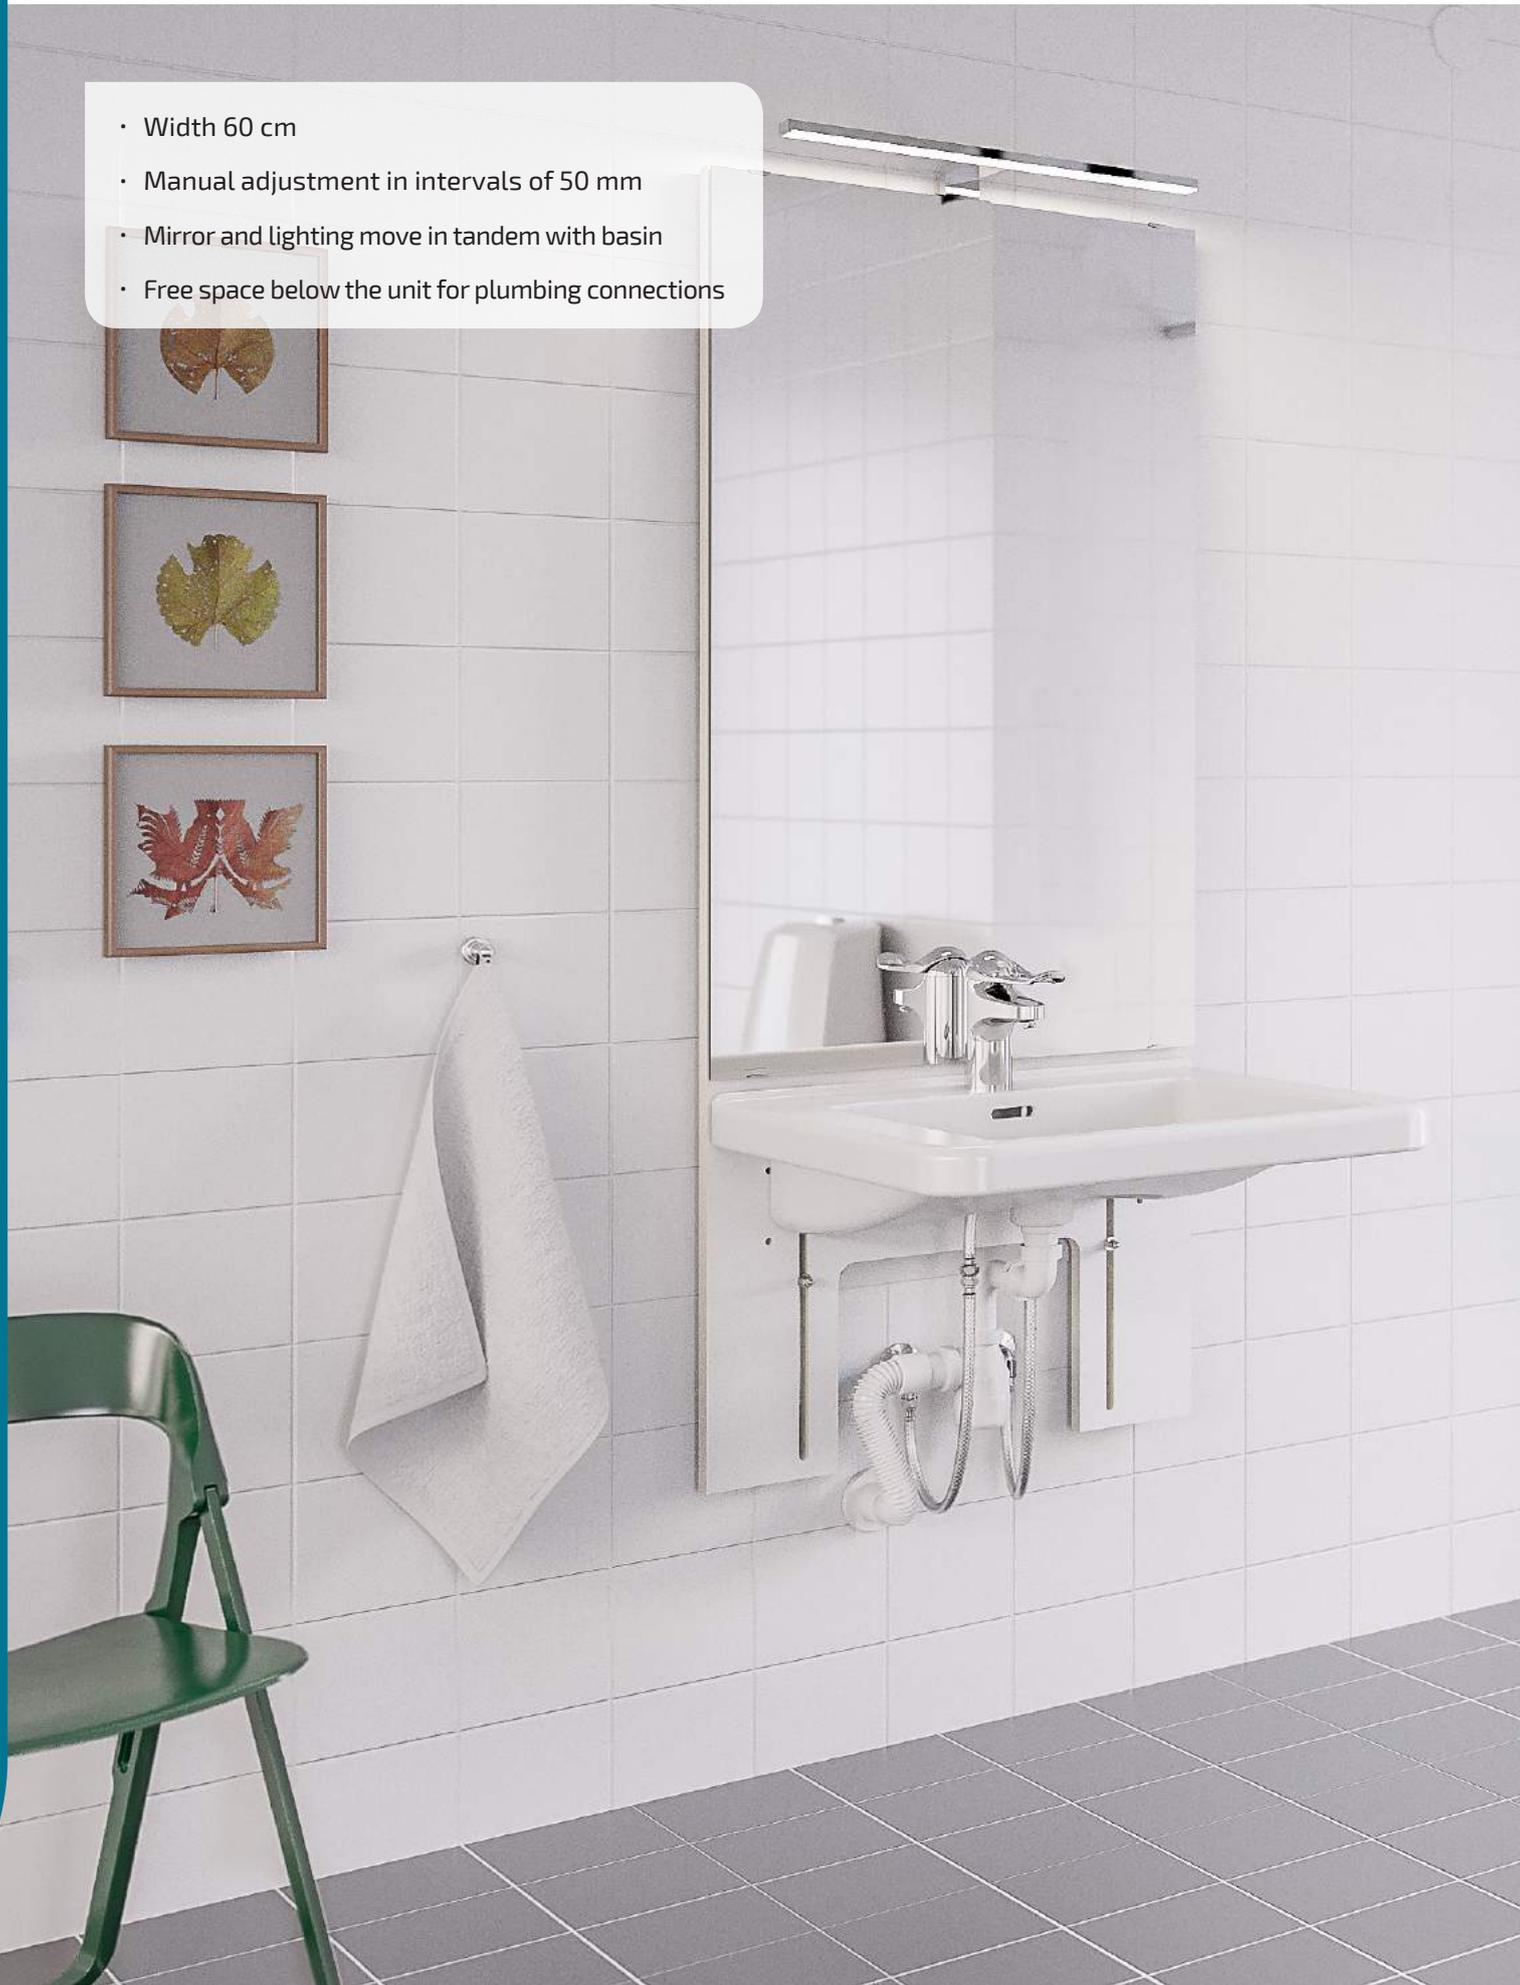



401-11-05

Page 38



- Overall depth 48.2 cm
- Compact washbasin for children or confined spaces

401-01-05

Page 39



- Overall depth 52.7 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

401-03-05

Page 40



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

401-10-05

Page 41



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

401-15-05

Page 42



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



**Functions and advantages**

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**

- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


**Specifications**

<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Legroom</b>	482 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	482 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
401-11-05	BASICLINE 401-11-05 - incl. single lever mixer with 150 mm lever

(mm)

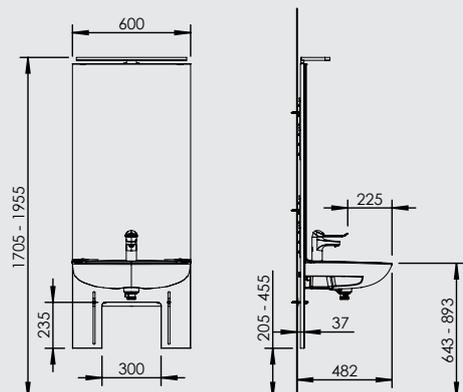



**Functions and advantages**

- Legroom under the washbasin, 527 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**

- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

**Specifications**


<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Legroom</b>	527 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 265 mm
<b>Overall depth from wall</b>	527 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
401-01-05	BASICLINE 401-01-05 - incl. single lever mixer with 150 mm lever



(mm)

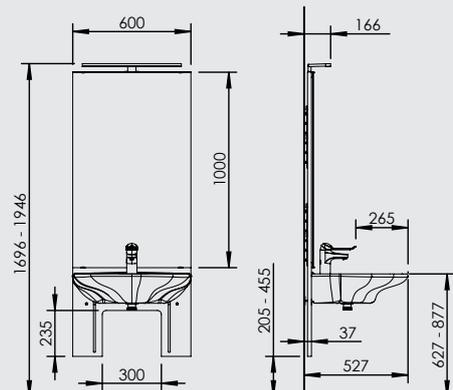



**Functions and advantages**

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**

- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


**Specifications**

<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Legroom</b>	587 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	587 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
401-03-05	BASICLINE 401-03-05 - incl. single lever mixer with 150 mm lever
	

(mm)

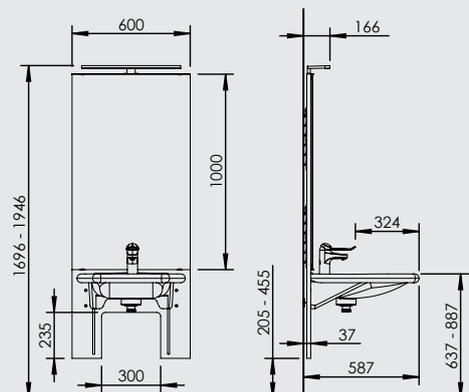



**Functions and advantages**

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


**Specifications**

<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Legroom</b>	587 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	587 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
401-10-05	BASICLINE 401-10-05 - incl. single lever mixer with 150 mm lever

(mm)

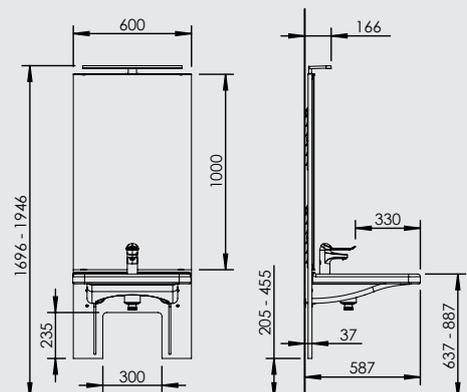



**Functions and advantages**

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


**Specifications**

<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Legroom</b>	587 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	587 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
401-15-05	BASICLINE 401-15-05 - incl. single lever mixer with 150 mm lever

(mm)

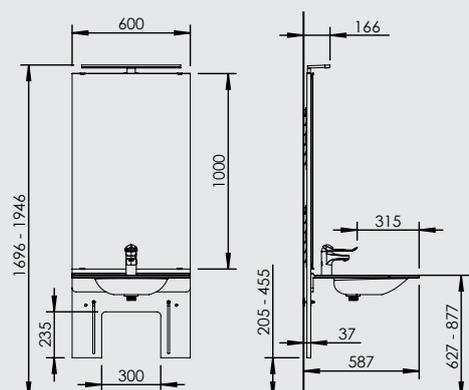



**Functions and advantages**

- Washbasin module optional basin

**Standard equipment**

- Mirror and lighting
- Track safety lock


**Recommended options**

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap

**Specifications**

<b>Lift model</b>	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	250 mm, intervals of 50 mm
<b>Lighting</b>	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
<b>Safety</b>	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
<b>Suitable basins</b>	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
<b>Material-specification</b>	<b>Back panel:</b> Plywood coated with high-pressure laminate <b>Mirror:</b> 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips <b>Wall track and hook suspension:</b> Aluminium
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
401-1.	BASICLINE 401-1 - Excl. water hoses and drain hose

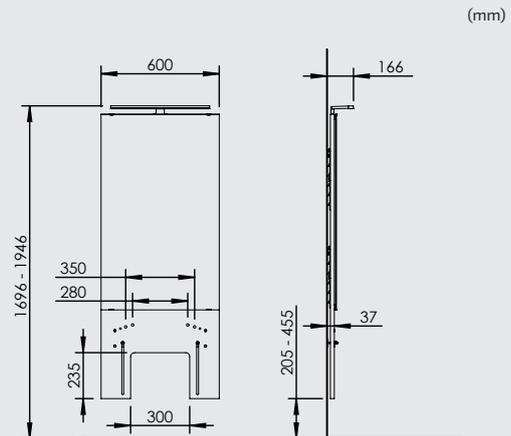

**Washbasin**

Page 62

**Mixer**

Page 65

**Hoses**

Page 68

# Basicline 403

Manually height-adjustable washbasins

- Width 60 cm
- Manual, stepless adjustment with socket spanner
- Free space below the unit for plumbing connections





403-11-05

Page 46



- Overall depth 48.2 cm
- Compact washbasin for children or confined spaces

403-01-05

Page 47



- Overall depth 52.6 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

403-03-05

Page 48



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

403-10-05

Page 49



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

403-15-05

Page 50



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Functions and advantages**

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**

- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Legroom</b>	482 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	482 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
403-11-05	BASICLINE 403-11-05 - incl. single lever mixer with 150 mm lever



(mm)

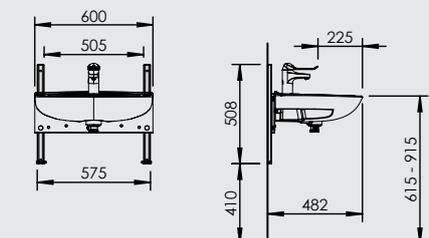

**Functions and advantages**

- Legroom under the washbasin, 526 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**

<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Legroom</b>	526 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 265 mm
<b>Overall depth from wall</b>	526 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE




**Art. no.**      **Designation**



403-01-05

BASICLINE 403-01-05  
- incl. single lever mixer with 150 mm lever

(mm)

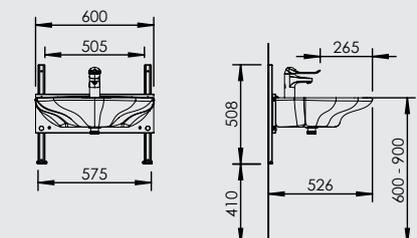

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	586 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
403-03-05	BASICLINE 403-03-05 - incl. single lever mixer with 150 mm lever



(mm)

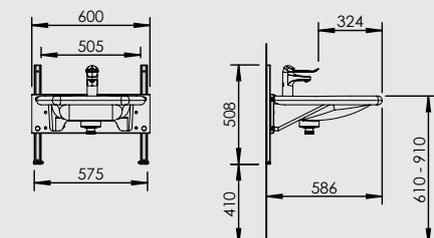

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**

<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	586 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE




**Art. no.**      **Designation**



403-10-05

BASICLINE 403-10-05  
- incl. single lever mixer with 150 mm lever

(mm)

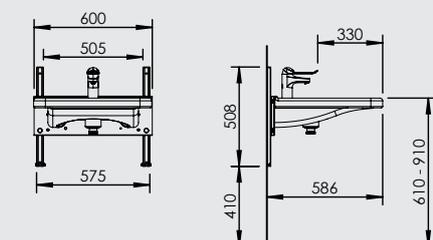

**Functions and advantages**

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**

<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Legroom</b>	586 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	586 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	100 kg
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE




**Art. no.**      **Designation**



403-15-05

BASICLINE 403-15-05  
- incl. single lever mixer with 150 mm lever

(mm)

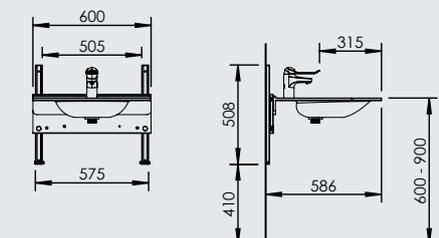

403-1



Art. no.	Designation
403-1.	BASICLINE 403-1 - Depth 36 mm

403-2



Art. no.	Designation
403-2.	BASICLINE 403-2 - Depth 120 mm

403-3



Art. no.	Designation
403-3.	BASICLINE 403-3 - Depth 220 mm

Functions and advantages

- Washbasin bracket optional basin
- 3 different depths: 36 mm / 120 mm / 220 mm

Standard equipment

- Washbasin bracket adjustable with socket spanner


Recommended options

- Washbasin
- Mixer
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

<b>Lift model</b>	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
<b>Width</b>	600 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	300 mm
<b>Suitable basins</b>	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
<b>Material-specification</b>	Powder coated aluzinc-coated sheet steel, white RAL 9010
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE

(mm)

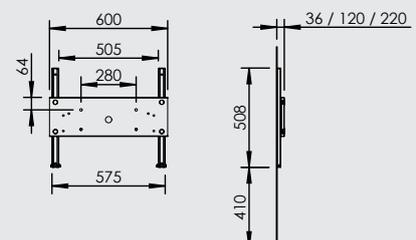

Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68

# Basicline 406

Gas strut operated height-adjustable washbasins

- Width 60 cm
- Manual adjustment with gas spring in intervals of 12 mm
- Practical countertop behind the washbasin
- Free space below the unit for plumbing connections





406-11-05

Page 54



- Overall depth 55.5 cm
- Compact washbasin for children or confined spaces

406-01-05

Page 55



- Overall depth 60.0 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

406-03-05

Page 56



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

406-10-05

Page 57



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

406-15-05

Page 58



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Functions and advantages**

- Legroom under the washbasin, 555 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

**Standard equipment**

- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**

<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Legroom</b>	555 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 225 mm
<b>Overall depth from wall</b>	555 mm
<b>Washbasin</b>	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE




**Art. no.**      **Designation**



406-11-05      BASICLINE 406-11-05  
- incl. single lever mixer with 150 mm lever

(mm)

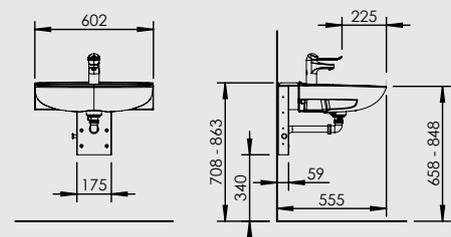



**Functions and advantages**

- Legroom under the washbasin, 600 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

**Standard equipment**

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Legroom</b>	600 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 265 mm
<b>Overall depth from wall</b>	600 mm
<b>Washbasin</b>	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
406-01-05	BASICLINE 406-01-05 - incl. single lever mixer with 150 mm lever



(mm)

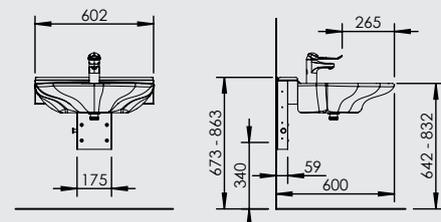

**Functions and advantages**

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

**Standard equipment**

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Legroom</b>	660 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 324 mm
<b>Overall depth from wall</b>	660 mm
<b>Washbasin</b>	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
406-03-05	BASICLINE 406-03-05 - incl. single lever mixer with 150 mm lever



(mm)

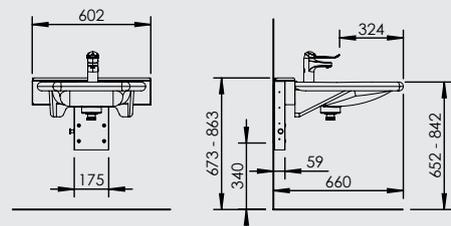

**Functions and advantages**

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

**Standard equipment**

- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Legroom</b>	660 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 330 mm
<b>Overall depth from wall</b>	660 mm
<b>Washbasin</b>	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	50 kg
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
406-10-05	BASICLINE 406-10-05 - incl. single lever mixer with 150 mm lever



(mm)

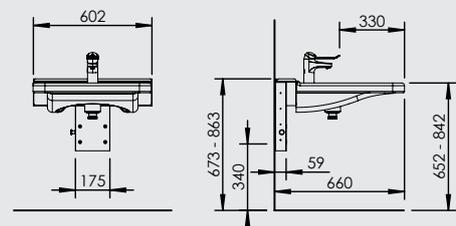

**Functions and advantages**

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

**Standard equipment**

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Legroom</b>	660 mm
<b>Mixer</b>	150 mm lever. Distance to mixer lever, 315 mm
<b>Overall depth from wall</b>	660 mm
<b>Washbasin</b>	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
<b>Max load, washbasin</b>	50 kg
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
406-15-05	BASICLINE 406-15-05 - incl. single lever mixer with 150 mm lever



(mm)

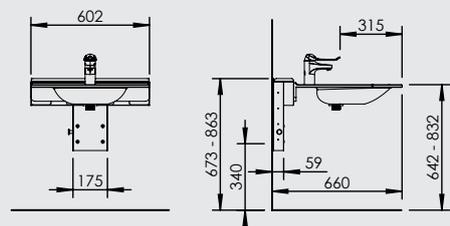

**Functions and advantages**

- Washbasin bracket optional basin with bolt installation centre-to-centre 280 mm or 350 mm

**Standard equipment**

- Washbasin bracket adjustable with gas spring
- Installation bolts for the washbasin

**Recommended options**

- Washbasin, bolt installation centre-to-centre 280 mm
- Mixer
- Flexible drain hose with drainage trap
- Flexible water hoses

**Specifications**


<b>Lift model</b>	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
<b>Width</b>	602 mm
<b>Installation</b>	Wall mounted
<b>Height adjustment</b>	190 mm in intervals of 12 mm
<b>Suitable basins</b>	Max. weight: 12-18 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
<b>Material-specification</b>	Epoxy coated aluminium, white (RAL 9016)
<b>Plumbing connections</b>	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
406-1.	BASICLINE 406-1 - Excl. water hoses and drain hose



(mm)

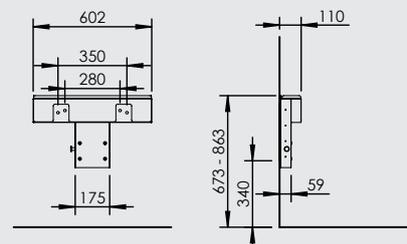

**Washbasin**

Page 62

**Mixer**

Page 65

**Hoses**

Page 68

# Washbasin, mixer and accessories





## Washbasin



### Functions and advantages

- Legroom under the washbasin, 445 mm
- Compact washbasin for children or confined spaces


### Specifications

<b>Size</b>	600x445 mm
<b>Legroom</b>	445 mm
<b>Design</b>	Porcelain washbasin incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Installation</b>	Bolt installation, CC 280 mm



Art. no.	Designation
425-011.	Granberg washbasin (425-011)

(mm)

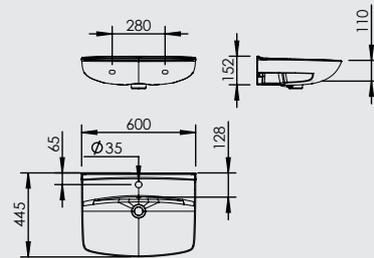

### Functions and advantages

- Legroom under the washbasin, 490 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge


### Specifications

<b>Size</b>	600x490 mm
<b>Legroom</b>	490 mm
<b>Design</b>	Porcelain washbasin incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Installation</b>	Bolt installation, CC 280 mm



Art. no.	Designation
425-001	Granberg washbasin 425-001, with overflow and strainer drain

(mm)

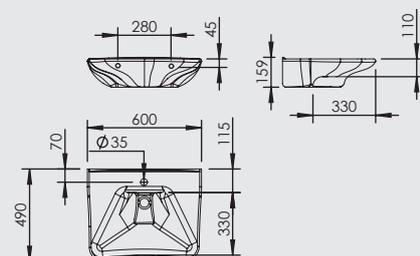

## Washbasin



### Functions and advantages


- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides



### Specifications

<b>Size</b>	550x550 mm
<b>Legroom</b>	550 mm
<b>Design</b>	Porcelain washbasin incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Installation</b>	Bolt installation, CC 280 mm

(mm)

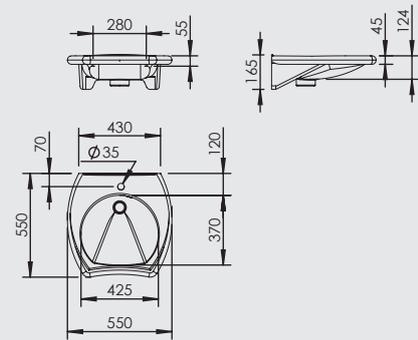

Art. no.	Designation
425-003.	Granberg washbasin (425-003)



### Functions and advantages


- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides



### Specifications

<b>Size</b>	600x550 mm
<b>Legroom</b>	550 mm
<b>Design</b>	Porcelain washbasin incl. overflow and bottom drain with plug
<b>Max load, washbasin</b>	100 kg
<b>Installation</b>	Bolt installation, CC 280 mm

(mm)

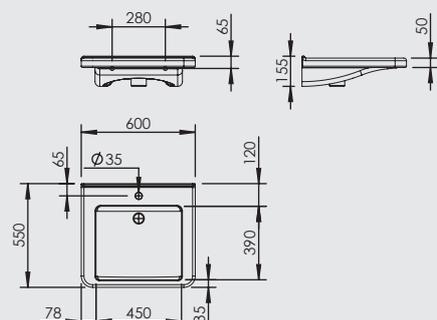

Art. no.	Designation
425-010.	Granberg washbasin (425-010)

# Washbasin



## Functions and advantages

- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots


## Specifications

<b>Size</b>	600x550 mm
<b>Legroom</b>	550 mm
<b>Design</b>	Wash basin of solid surface material with integrated grab handles, excl. overflow
<b>Max load, washbasin</b>	150 kg
<b>Installation</b>	Bolt installation, CC 280 mm



Art. no.	Designation
425-015.	Granberg washbasin (425-015)

(mm)

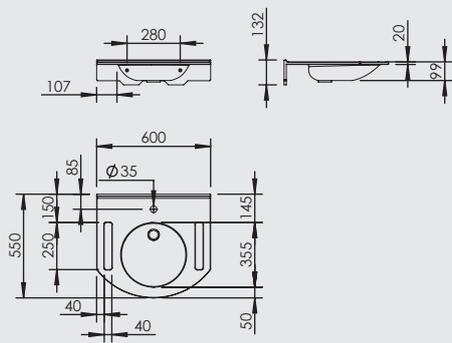




## Functions and advantages

- Easily accessible lever, length 150 mm

## Specifications

<b>Lever</b>	150 mm
<b>Spout projection</b>	100 mm
<b>Connection pipe</b>	Soft PEX pipe, length 360 mm
<b>Hole size</b>	Ø 33.5–37 mm
<b>Other</b>	Cold start feature Soft action ceramic shut-off Built-in, easily adjustable flow control and temperature limiter

Art. no.	Designation
425-105.	Basin mixer Granberg 425-105 - 150 mm lever

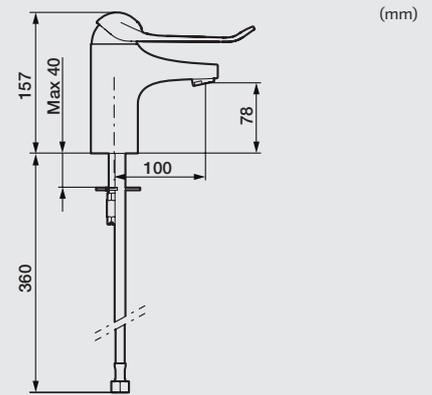


## Functions and advantages

- Easily accessible lever, length 150 mm
- Self-closing hand shower

## Specifications

<b>Lever</b>	150 mm
<b>Spout projection</b>	100 mm
<b>Length of hose, hand shower</b>	1500 mm
<b>Connection pipe</b>	Soft PEX pipe, length 350 mm
<b>Hole size</b>	Ø 33.5–37 mm
<b>Other</b>	Cold start feature Soft action ceramic shut-off Built-in, easily adjustable flow control and temperature limiter

Art. no.	Designation
425-106.	Basin mixer Granberg 425-106 - 150 mm lever with self-closing hand shower

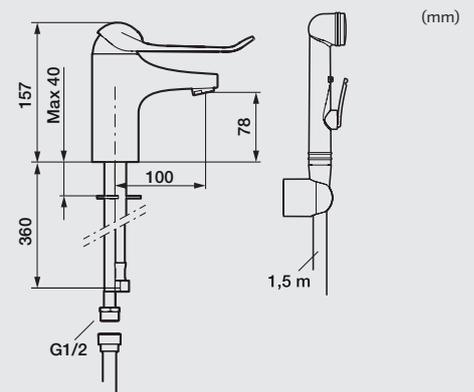




## Functions and advantages

- Touch-free, easy to use

## Specifications

<b>Lever</b>	150 mm
<b>Spout projection</b>	108 mm
<b>Connection pipe</b>	Soft PEX pipe, length 350 mm
<b>Hole size</b>	Ø 33.5-37 mm
<b>Other</b>	The temperature is set at the side of the mixer Low power consumption – long life Battery included

Art. no.	Designation
425-110.	Basin mixer Granberg 425-110 - Touch free

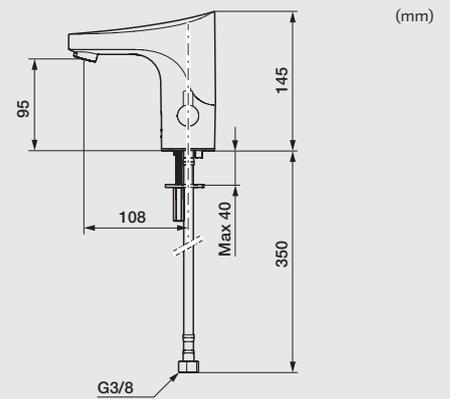



### Functions and advantages

- Easily accessible lever, length 150 mm
- Swivel spout 110°


### Specifications

<b>Lever</b>	150 mm
<b>Spout projection</b>	115 mm
<b>Swivel spout</b>	110°
<b>Connection pipe</b>	Soft PEX pipe, length 350 mm
<b>Hole size</b>	Ø 28-37 mm
<b>Other</b>	Soft-close action with ceramic seal Adjustable flow and temperature limiters

Art. no.	Designation
----------	-------------

425-107. Basin mixer Granberg 425-107  
- 150 mm Lever

**Discontinued**

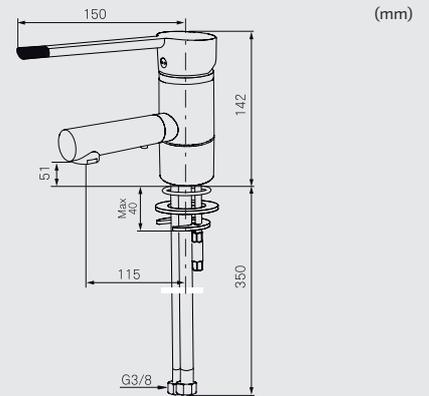





## Specifications

Length	500 mm
Connection	R10 3/8"

Art. no.	Designation
425-311.	Water hoses, 2 pack



## Specifications

Length	315 to 815 mm (spring-loaded)
Connection	Collar 40 mm. Rubber nipple 50-40 mm included

Art. no.	Designation
425-331.	Flexible drain hose with drainage trap


## Safety system



### Specifications

<b>Function</b>	Thanks to the safety switch, the basin will stop lowering if it comes into contact with any obstacle or the user's legs.  Suitable for washbasins with 280 mm centre-to-centre bolt installation.
<b>Installation</b>	Installed between the back panel and wash basin

(mm)



Art. no.	Designation
425-401.	Safety switch to Designline 417 and Basicline 433, bolt attachment centre-to-centre 280 mm
425-403	Safety switch for Basicline 415 washbasin, bolt attachment, centre-to-centre 280 mm

## Control buttons



### Cable Hand Control

Dimensions: 170 x 63 x 27 mm

425-410



### Radio Control - Hand Control


Dimensions: 110 x 38 x 10 mm

61385


# Installations

## Fittings and plumbing connections for electric height-adjustable models

**Model:**  
Baseline 433  
Designline 417

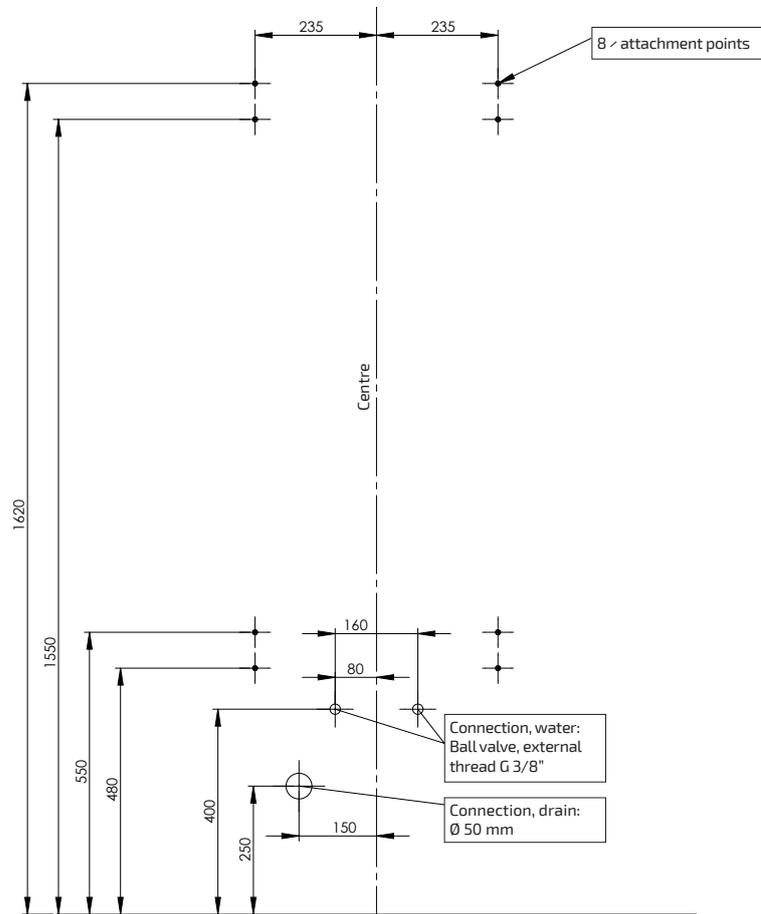


**Model:**  
Baseline 415

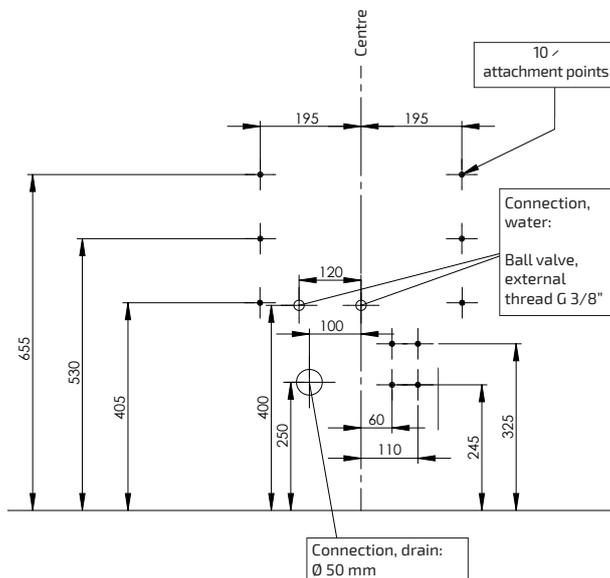


# Installations

## Fittings and plumbing connections for manual height-adjustable models


**Model:**  
Baseline 401

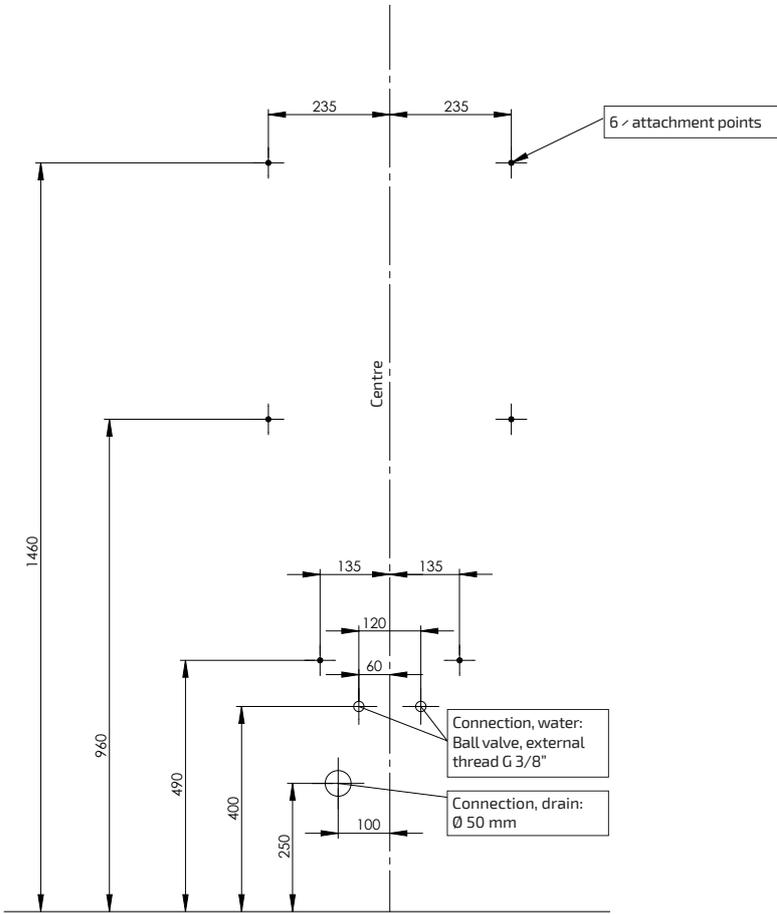

**Model:**  
Baseline 403

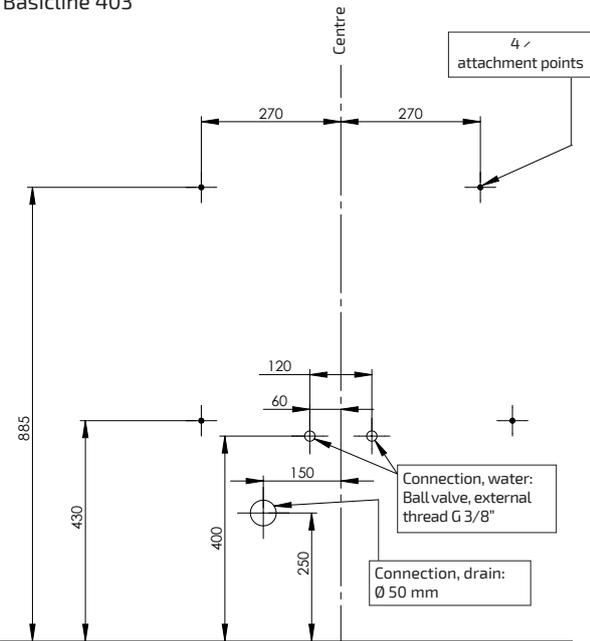

**Model:**  
Baseline 406

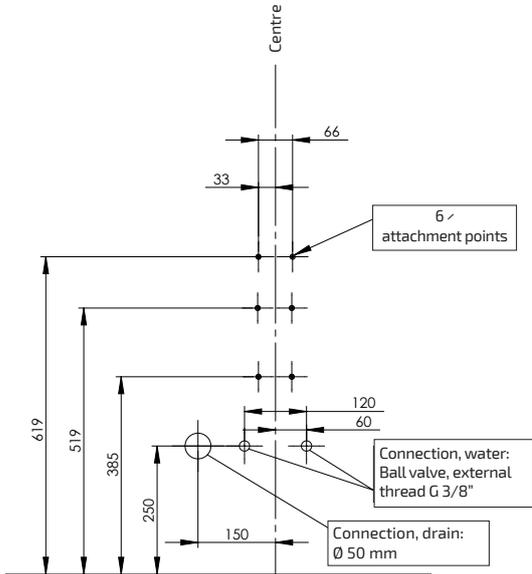


# Installations

## Electrical installation


**Model:**

Basicline 433  
Designline 417

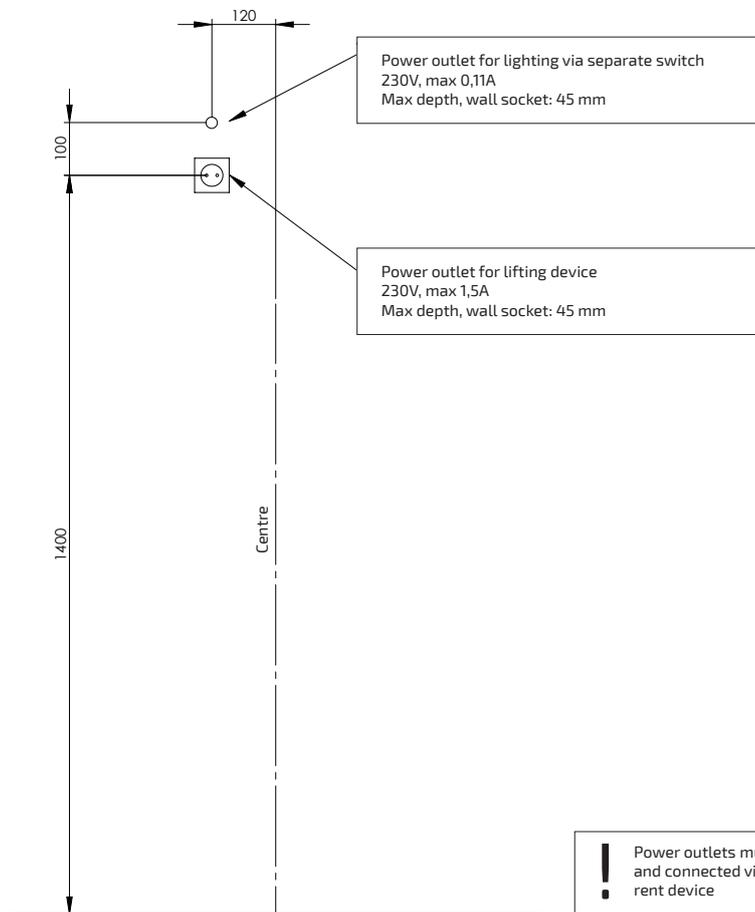

**Model:**


Basicline 415

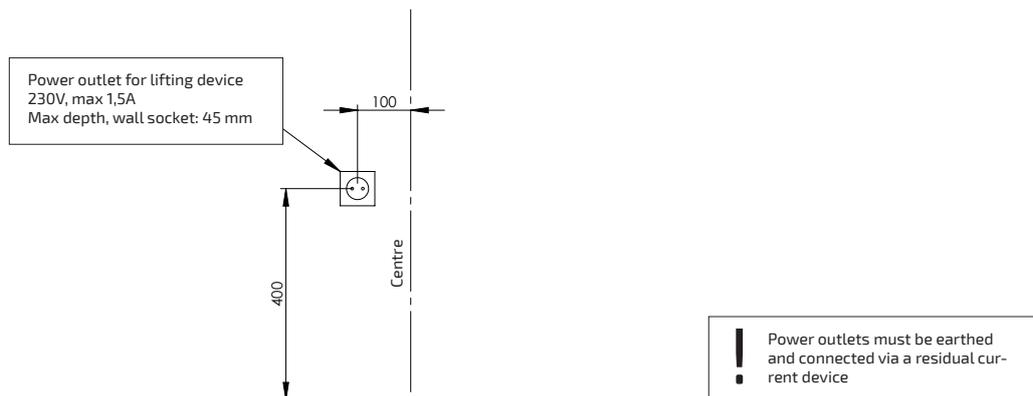

# Installations

## Electrical installation

**Model:**  
Baseline 401

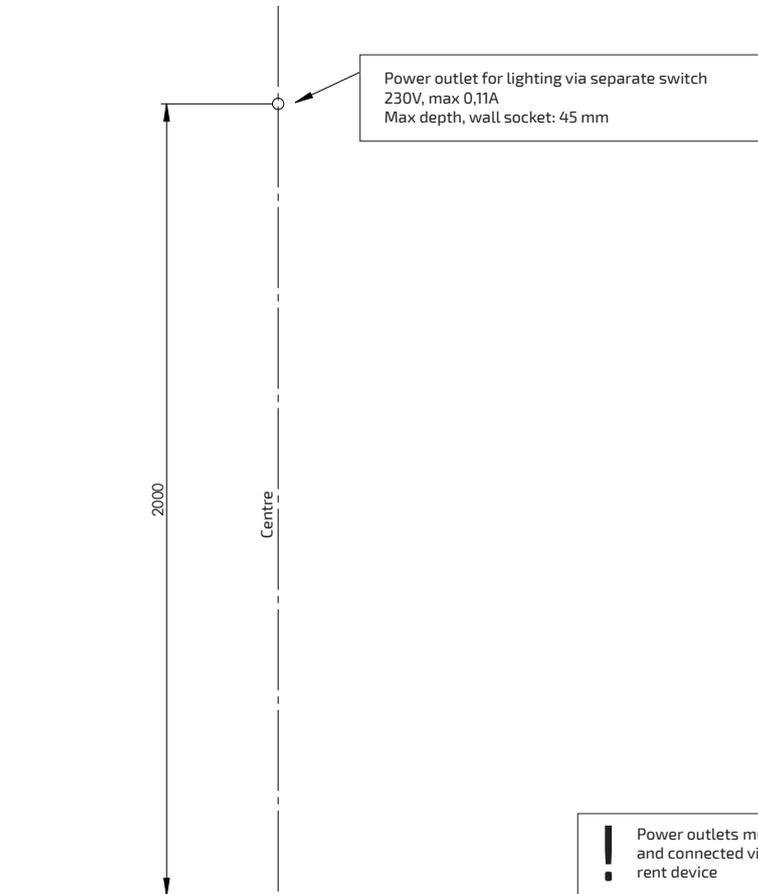

**!** Power outlets must be earthed and connected via a residual current device

# Manufacturer

Granberg Interior AB

Box 6112, SE-600 06 Norrköping, SWEDEN

Street address: Importgatan 30, SE-602 28 Norrköping, SWEDEN

Telephone: +46(0)11-19 77 50

Website: [www.granberg.se](http://www.granberg.se)

# Contact

## UK and Ireland distributor

Independent 4 Life Limited

Unit C, Mainline Business Centre, 74 Station Road, Liss, Hampshire, GU33 7AD, UNITED KINGDOM

Telephone: +44 (0)23 92755992

UK Freephone: 0800 500 3001

Email: [info@independent4life.co.uk](mailto:info@independent4life.co.uk)

Website: [www.independent4life.co.uk](http://www.independent4life.co.uk)



SINCE 1870



**GRANBERG INTERIOR AB**  
Box 6112  
SE-600 06 Norrköping  
Sweden  
Tel: +46 (0)11-19 77 50  
E-post: [info@granberg.se](mailto:info@granberg.se)  
Internet: [www.granberg.se](http://www.granberg.se)

SINCE 1870



**Dealer**

Independent 4 Life Limited  
Unit C, Mainline Business Centre  
74 Station Road  
Liss  
Hampshire  
United Kingdom  
GU33 7AD  
Tel: 0800 500 3001  
Tel: +44 (0)23 92755992  
E-mail: [info@independent4life.co.uk](mailto:info@independent4life.co.uk)  
Internet: [www.independent4life.co.uk](http://www.independent4life.co.uk)



Independent 4 Life